



Energy Storage Inverter Modbus TCP&RTU Communication protocols

V3.28

Write single registers





History list:

Date	Name	detail	Versi	other
2020-6-16	GaoRui	1.Delete RF related data; 2.Modify work mode related data; 3.The communication format is changed from the original Modbus TCP to Modbus RTU.	V3.01	Completed according to the ModBus TCP X1&X3
2020-8-14	GaoRui	1.Modify the corresponding meaning of language . (0:English1:German2:French3:Polish4:Spanish 5: Portuguese) 2.Modify the Feedin power description (0x0046 register). 3.Write single register and Read holding register add EnableMPPT.	V3.02	
2020-8-28	GaoRui	1.Add safety type description.(0x03Read Holding Register, 0x001D Safety.)	V3.03	
2020-10-7	WangJianXin	Add Vpp Control function registers	V3.04	
2020-10-9	GaoRui	1.Modify the Vpv_High_Stop, Vpv_Low_Stop parameter to Adjust_Battery_U,Adjust_Battery_I. 2.Delet the Vpv_Start parameter,Write Single Register 0x0001 variable Reserve. 3.Delet these ModbusPowerControl, ModbusActivePower, ModbusReactivePower, PowerControl_timeout parameters.Write Sigle Register 0x0051、0x0052、0x0053、0x009F, And ModbusPowerControl、PowerControl timeout Read Holding Register	V3.05	
2020-11-11	GaoRui	1.Add SelfUse_NightCharge_Enable, Feedin_NightCharge_UpperSoC,BackUp_NightCharge_UpperSoC; .(0x03Read Holding Register , 0x0092(Hi),0x0094(Lo),0x0095(Lo).) 2.Add Safety type description: 28 RD1699_Island. 3. Add ReconnectionTime Read Holding Register 0x0017, Write Single Register 0x0001. 4.Modify 0x5F Reset_Manger_EE parameter's decription (0x06: Write Single	V3.06	

2020-12-22	GaoRui	<p>1.Delete PowerManagerConfigData、PowerManagerEnable parameters.</p> <p>2.Add HardwareVersionDSP parameter, which at 0x007D Holding Register.</p> <p>3.Modify absorpt_voltage parameter position, which from 0x00A7 to 0x0092 at Holding Register.</p> <p>4.Delete wDcvFaultVal parameter.</p> <p>5. Modify the Eps description to Off-grid in the full text.</p>	V3.07	
2021-01-29	GaoRui	<p>1.Add Registration Code(for external module) parameter, which from 0x00AA to 0x00AE at Read Holding Register.</p> <p>2.Modify 0x0116 register LVRT_Function</p>	V3.08	
2021-03-02	wangjianxing	<p>1.Add Adjust_CT parameters, which from 0x0034 to 0x0037 at Write Single Register.</p> <p>2.Modify some BMS warning Spelling</p>	V3.09	
2021-06-21	wangjianxing	<p>Add Notice explain about use “Write Single Registers”and”WriteMultiple Registers” attentions</p> <p>Add Write single registers 0x0029~0x002E about CalibGainInvVolt and CalibEPSDcvAdj</p> <p>Add Read Input registers 0x009C~0x009E about InvVoltR、InvVoltS、InvVoltT</p>	V3.10	
2021-08-19	wangjianxing	<p>Add Write single registers</p> <p>0x00A4 : DirectionMeterCT1</p> <p>0x00A5 : DirectionMeter2</p> <p>Add Read Input registers</p> <p>0x010B : DirectionMeterCT1</p> <p>0x010C : DirectionMeter2</p>	V3.11	
2021-9-3	wangjianxing	<p>Add safety types(AS 4777_2020_B、AS 4777_2020_C、User-Defined、EN50549_Romania、CEI016)</p> <p>Add Read Input Registers</p> <p>0x00BA Battery_Tem_High</p> <p>0x00BB Battery_Tem_Low</p> <p>0x00BC Cell_Voltage_High</p> <p>0x00BD Cell_Voltage_Low</p> <p>Add Write single register</p>	V3.12	
2021-9-28	Tangyanchong	<p>Add Read Holding Registers</p> <p>0x11C bPVCconnectionMode(X1)</p> <p>Add Write Single Registers</p> <p>0x0051 PVConnectipon(X1)</p> <p>0x00AE PuFuncEnable</p> <p>0x00AF PuFunc_ResponseV1</p> <p>0x00B0 PuFunc_ResponseV2</p> <p>0x00B1 PuFunc_ResponseV3</p> <p>0x00B2 PuFunc_ResponseV4</p> <p>0x00B3 PuFunc_3Tau</p>	V3.13	

2021-11-2	wangji anxing	Add Read Holding Registers 0x00A8 wBatteryDischargeBackupVoltage Add Write Single Registers 0x0026 wBatteryDischargeBackupVoltage Add Upgrade W/R Register and Example	V3.14	
2021-11-22	Tangyan chong	Add Read Holding Registers 0x011C ShutDown 0x011D MicroGrid 0x011E SelfuseModeBackupEn 0x011F bSelfUse_BackupSoc 0x0120 bLeaseModeEnable 0x0121 bDeviceLockFlag 0x0122~0x012E: DryContact Regisers 0x012F DryContactMode 0x0130 Parallel Setting Add Write Single Registers 0x0052 ShutDown 0x0053 MicroGrid 0x00B4 LeaseModeEnable 0x00B5 DeviceLockFlag 0x00B6~0x00C3:DryContact Regisers 0x00C4 SelfuseModeBackupEn 0x00C5 SelfUse_BackupSoc 0x00C6 Parallel Setting	V3.15	
2022-01-04	Tangyan chong	Add Upgrade Example For X1G4(File DSP)	V3.16	
2022-01-11	wangji anxing	Add Read Holding Registers 0x00A9 MatchResistanceSet(X3) 0x0131 ExternalGenEn 0x0132 ExternalGenMaxCharge Add Write Single Registers 0x00C6 MatchResistanceSet(X3) 0x00C7 ExternalGenEn 0x00C8 ExternalGenMaxCharge	V3.17	
2022-01-13	tangyan chong	Add Read Holding Register (BMS Info) Add Read Input Registers 0x011F wBatteryForceChargeFlag 0x0120 wBMSRelayState Add Read Holding Registers 0x00B9 Off-grid Frequncy	V3.18	
2022-1-29	wangji anxing	Add Read Holding Registers 0x0103 CtType(X3) Add Write Single Registers 0x0027 CtType(X3) Sync app settings parameters	V3.19	

2022-4-14	wangjiaxing	<p>Adjust the protection range of some parameters (0x0005、0x0006、0x0008、0x000D、0x000F)</p> <p>Add Read Holding Registers 0x00A0 EpsRestartSoc 0x00A1 HotStandbyEN 0x00A2 ExtendBmsSetting 0x00B2 PgridBias</p> <p>Add Write Single Registers 0x008E EpsRestartSoc 0x0099 HotStandbyEN 0x009A ExtendBmsSetting 0x008C EpsBatLowAutoRecoverVoltage</p>	V3.20	
2022-6-21	wangjiaxing	<p>Add Read Holding Registers 0x00F2 SetpointTimeout 0x0110 InPutDI1 0x0114 ShadowFixFuncEnable2 0x007F FirmwareVersion_DSP_Major 0x0080 FirmwareVersion_ARM_Major</p> <p>Add Write Single Registers 0x0098 ShadowFixFuncEnable2</p>	V3.21	
2022-10-14	tangyanchong	<p>Add Read Holding Registers 0x010E BatteryChargeMaxSoc 0x010F bBatterToEVCharge</p> <p>Add Write Single Registers 0x00E0 BatteryChargeMaxSoc 0x00E1 bBatterToEVCharge</p> <p>Add Table Read Holding Register (Data Hub)</p> <p>Add Table Read Input Register(Data Hub)</p> <p>Add Table Write Multiple Register(Data Hub)</p> <p>Adjust “Export control user limit” accuracy</p>	V3.22	
2023-1-6	wangjiaxing	<p>Add Read Input Registers: 0x0121:BMS_RestartFlag</p> <p>Add Write Single Registers: 0x00E2: BMS_Restart</p> <p>Repair function code 0x04 registers 0x00BD~0x00C4 and function code 0x06 registers 0x004A~0x0050 data format mistake. (1ms(X1) 10ms(X3))</p> <p>Add Gen Fuction Registers:</p> <p>Read Holding Registers 0x0140~0x0147</p> <p>Write Single Registers 0x00E3~0x00EB</p> <p>Update partial write parameter range.</p> <p>Add Read Holding Register: VPPPExitIdleEn(0x00B4) PeakShvingMode parameter (0x0150~0x0159)</p> <p>Add Write Single Registers: PeakShvingMode parameter (0x00EA~0x0F3) VPPPExitIdleEn(0x00F4)</p>	V3.23	



2023-3-17	tangyancong	Add Read Holding Registers: 0x00B3: FastCtCheckEn 0x015C: EVChargerAddr 0x015E: AdaptBoxG2Addr Add Write Single Registers: 0x00F5: FastCtCheckEn 0x00F9: EVChargerAddr 0x00FB: AdaptBoxG2Addr Revise Write Single Registers PeakShvingMode Parameter (0x00EA~0x00ED) BatteryHeating Parameter(0x00D0~0x00D3) Gen Allow Work Time(0x00E8~0x00E9)	V3.24	
2023-6-5	tangyancong	Add Read Holding Registers: 0x0160 CTFalutEn 0x0160 u16SuperBuckUpEn Add Write Single Registers: 0x00FD CTFalutEn 0x00FE u16SuperBuckUpEn;	V3.25	

2023-6-5	tangyan chong	<p>Add Read Holding Registers: 0x0162 GenCharge_StartHour GenCharge_StartMinute 0x0163 GenCharge_EndHour GenCharge_EndMinute 0x0164 GenDischarge_StartHour GenDischarge_EndMinute 0x0165 GenDischarge_StartHour GenDischarge_EndMinute 0x0166 GenP2_SetEnable 0x0167 GenP2Charge_StartHour GenP2Charge_StartMinute 0x0168 GenP2Charge_EndHour GenP2Charge_EndMinute 0x0169 GenP2Discharge_StartHour GenP2Discharge_EndMinute 0x016A GenP2Discharge_StartHour GenP2Discharge_EndMinute 0x016B ChargeFromGenEnable 0x016C ChargeFromGen_ChargeSoC 0x016D GenMinPower Add Write Single Registers: 0x0FF SmartScheduleWorkMode 0x0100 GenCharge_StartHour GenCharge_StartMinute 0x0101 GenCharge_EndHour GenCharge_EndMinute 0x0102 GenDischarge_StartHour GenDischarge_EndMinute 0x0103 GenDischarge_StartHour GenDischarge_EndMinute 0x0104 GenP2_SetEnable 0x0105 GenP2Charge_StartHour GenP2Charge_StartMinute 0x0106 GenP2Charge_EndHour GenP2Charge_EndMinute 0x0107 GenP2Discharge_StartHour GenP2Discharge_EndMinute 0x0108 GenP2Discharge_StartHour GenP2Discharge_EndMinute 0x0109 ChargeFromGenEnable 0x010A ChargeFromGen_ChargeSoC 0x010B GenMinPower</p>	V3.26	
20230717	JiaoGuangwen	<p>1、更新X3-Hybrid-G4安规内容 2、更新X3-Hybrid-G4部分电压范围： 一/二级欠/过压保护值(0x05/0x06/0x0c/0x0d) QuResponseV1/2/3/4(0x81~0x84) ResponseV1/2/3/4(0xaf~0xb2) Adjust_AC_Volt_R/S/T(0x17/0x31/0x33) CalibGainInvoltR/S/T(0x29~0x2b) CalibEPSDcvAdjRS/T(0x2c~0x2e) 3、Modify Write Single Registers: 0x0047: Language</p>	V3.27	



202308 25	Tangyan chong	Add Write Single Registers: 0x00DF Reset INV 0x010C FastInEPS Add Read Holding Registers: 0x016D FastInEPSEn	V3.28	
202310 12	Fangzi yin	Modify Write Single Registers: 0x001F SolarChargeUseMode 0x008F 485CommFunSelect Add Write Single Registers: 0x010D BATtoHeatpumpEn 0x010E HeatPumpMeterAddr 0x0111 EVC&AdaptPriority 0x0112 LoadMaxPower Modify Read Holding Registers: 0x008B SolarChargeUseMode 0x013E 485CommFunSelect Add Read Holding Registers: 0x016E~0x0173: 0x016E(L) TOUMode_TotalMinSoc 0x016E(H) TOUMode_WorkMode 0x016F TOUMode_SelfUseMinSOC 0x0170(L) TOUMode_ChargeFromGridEn 0x0170(H) TOUMode_ChargeStopSOC 0x0171(L) TOUMode_DischgPowerLimitRate 0x0171(H) TOUMode_DischargeMinSOC 0x0172 TOUMode_PeakShavingLimit(L) 0x0173 TOUMode_PeakShavingLimit(H) 0x0174 bShotoffEn(X3) 0x0175 PowerFactor_Qu_VoltRatio2 0x0176 PowerFactor_Qu_VoltRatio3	V3.29	



Version matching information

Protocol version	ARM version(X1)	ARM version(X3)
V3.01	V1.01~V1.03	V1.01~V1.03
V3.02		
V3.03		
V3.04		
V3.05		
V3.06		
V3.07	V1.04~1.14	V1.04~V1.09
V3.08		
V3.09		
V3.10		
V3.11	1.15	V1.10~V1.19
V3.12		
V3.13		
V3.14	1.16	1.20
V3.15		
V3.16		
V3.17		
V3.18		

Protocols general

Protocol type: Modbus RTU(for 485)

Address: 1(default)

Braud Rate: 19200(default)


Data bits: 8

Stop Bit: 1

Parity: None



Frame format:

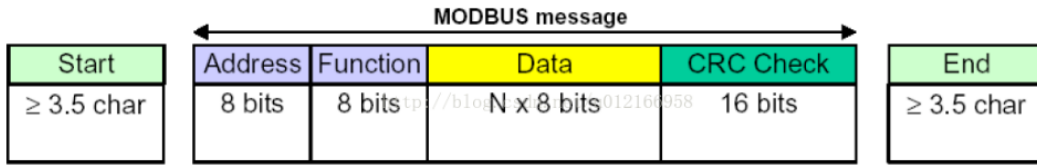

protocols type: Modbus TCP(for **Monitoring module**)


port: 502

Transaction ID:No compulsory requirements

Protocol ID:No compulsory requirements

UnitID:No compulsory requirements, use 0x01 by default

frame format:

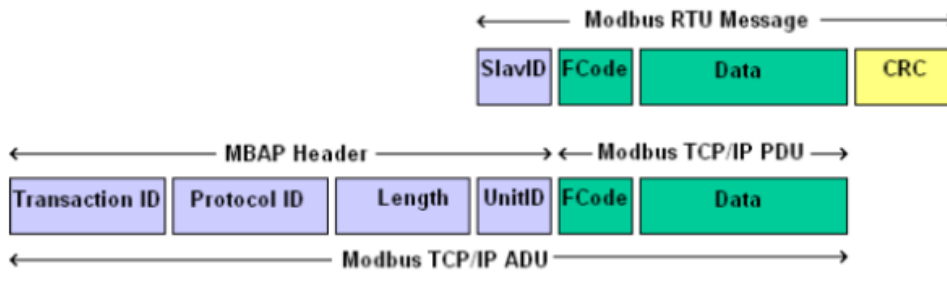

Note:The inverter itself does not support modbus tcp function,function expansion must be completed through the monitoring module of solax.Since it is used for external expansion, the query cycle is expected to be controlled at about 1 second.

Time request:

Timing parameter	Value
The least interval time between two instructions	1 Sec
Character-gap time out(silent time between 2 package)	>100ms
Response timeout	1 Sec

Notice:When use“**Write Single Registers**”and”**Write Multiple Registers**”function,some registers will be write in EEprom if they are changed(these parameters can be saved after power failure).But the EEprom has the write times limit.Too frequent operation will lead to irreversible hardware damage.Related registers are marked with ★.If there is any doubt about the use, please contact the technical personnel in time.

0x03:Read Holding Register

32bit data use little endian format



Function Cod	Read Holding Register						
	Register	Variable	W/R	descripton	Unit	Data forma	Le ng
	0x0000 ~0x000	InverterSN	R	14Chars, MSB=SN[14]	14Char	uint16	7
	0x0007 ~0x000	FactoryName	R	14Chars, MSB=SN[14]	14Char	uint16	7
	0x000E	ModuleName	R	14Chars, MSB=SN[14]	14Char	uint16	7
	0x0015	REV				uint16	1
	0x0016	TimeStart	R	launch wait time	1s	uint16	1
	0x0017	ReconnectionTime	R	Reconnection Time	1s	uint16	1
	0x0018	CheckingTime	R	CheckingTime	1s	uint16	1
	0x0019	VacMinProtect	R	allowed minimum grid	0.1	uint16	1
	0x001A	VacMaxProtect	R	allowed maximum grid	0.1	uint16	1
	0x001B	FacMinProtect	R	allowed minimum grid frequency	0.01Hz	uint16	1
	0x001C	FacMaxProtect	R	allowed maximum grid frequency	0.01Hz	uint16	1

	0x001 D	SafetyCode	R	<p>Safety type</p> <p>0: VDE0126</p> <p>1: VDE4105</p> <p>2: AS 4777_2020_A</p> <p>3: G98/1 (X1/X3)</p> <p>4: C10/11</p> <p>5: TOR(X1/X3)</p> <p>6: EN50438_NL</p> <p>7: Denmark2019_W(X3)</p> <p>8: CEB</p> <p>9: CEI021</p> <p>10:NRS097_2_1</p> <p>11:VDE0126_Gr_Is</p> <p>12:UTE_C15_712</p> <p>13:IEC61727(X1/X3)</p> <p>14:G99/1</p> <p>15:VDE0126_Gr_Co</p> <p>16: Guyana</p> <p>17:C15_712_is_50</p> <p>18:C15_712_is_60</p> <p>19:New Zealand</p> <p>20:RD1699</p> <p>21:Chile</p> <p>------(X3)-----</p> <p>22:Israel</p> <p>23:Czech_PPDS_2020</p> <p>24:RD1699_Island</p> <p>25:EN50549_Poland</p> <p>26:EN50438_Portugal</p> <p>27:PEA</p> <p>28:MEA</p> <p>29:EN50549_Sweden</p> <p>30:Philippines</p> <p>31:EN50438_Slovenia</p> <p>32:Denmark2019_E</p> <p>33:EN50549_EU</p> <p>34:AS 4777_2020_B</p> <p>35:AS 4777_2020_C</p> <p>36:User-Defined</p> <p>37:EN50549_Romania</p> <p>38:CEI016</p> <p>39: ACEA</p> <p>40: Chile2021 MT_R</p> <p>41: Chile2021 MT_U</p> <p>42: Czech_2022_2</p> <p>43: G98/NI-1</p> <p>44: G99/NI-1</p> <p>45: G99/NI_Type B</p> <p>46: CQC</p> <p>47: LA_3P_380</p> <p>48: LA_3P_220</p> <p>------(X3)-----</p> <p>------(X1)-----</p> <p>22:EN50438_Ireland</p> <p>23:Philippines</p> <p>24:Czech PPDS_2020</p> <p>25:Czech_50438</p> <p>26: EN50549_EU</p> <p>27: Denmark2019_E</p>	-	uint16	1
--	------------	------------	---	---	---	--------	---

0x001	MateBoxEnable	R	0:Disable 1:Enable	1	uint16	
0x001	Grid10MinAvgProtect	R	10minutes over voltage	0.1	uint16	
0x0020	VacMinSlowProtect	R	grid undervoltage protect	0.1	uint16	
0x0021	VacMaxSlowProtect	R	grid overvoltage protect	0.1	uint16	
0x0022	FacMinSlowProtect	R	grid underfrequency protect value	0.0 1HZ	uint16	
0x0023	FacMaxSlowProtect	R	grid overfrequency protect value	0.0 1HZ	uint16	
0x0024	REV	R	-	-	uint16	
0x0025	PowerLimitsPercent	R	output power limits	0~1	uint16	
0x0026	PowerfactorMode	R	0: Off 1:Over Excited 2:Under Excited 3:Curve 4:Qu 5:Fix Q Power	1	uint16	
0x0027	PowerfactorData	R	Power factor data	0.0	uint16	1
0x0028	PowerFactor_Curve_PF1	R	PowerFactor_Curve_PF1	0.0	uint16	1
0x0029	PowerFactor_Curve_PF2	R	PowerFactor_Curve_PF2	0.0	uint16	1
0x002	PowerFactor_Curve_PF3	R	PowerFactor_Curve_PF3	0.0	uint16	1
0x002	PowerFactor_Curve_PF4	R	PowerFactor_Curve_PF4	0.0	uint16	1
0x002	PowerFactor_Curve_Power1	R	PowerFactor_Curve_Po	1%	uint16	1
0x002	PowerFactor_Curve_Power2	R	PowerFactor_Curve_Po	1%	uint16	1
0x002	PowerFactor_Curve_Power3	R	PowerFactor_Curve_Po	1%	uint16	1
0x002	PowerFactor_Curve_Power4	R	PowerFactor_Curve_Po	1%	uint16	1
0x0030	PowerFactor_Curve_PfLockInP	R	PowerFactor_Curve_PfL	0.0	uint16	1
0x0031	PowerFactor_Curve_PfLockOutPoint	R	PowerFactor_Curve_PfLockOutPoint	0.0 1	uint16	1
0x0032	PowerFactor_Curve_3Tau	R	PowerFactor_Curve_3Ta	1s	uint16	1
0x0033	PowerFactor_Qu_VoltRatio1	R	PowerFactor_Qu_VoltRa	1%	uint16	1
0x0034	PowerFactor_Qu_VoltRatio4	R	PowerFactor_Qu_VoltRa	1%	uint16	1
0x0035	PowerFactor_Qu_QuResponse	R	PowerFactor_Qu_QuRes	0.1	uint16	1
0x0036	PowerFactor_Qu_QuResponse	R	PowerFactor_Qu_QuRes	0.1	uint16	1
0x0037	PowerFactor_Qu_QuResponse	R	PowerFactor_Qu_QuRes	0.1	uint16	1
0x0038	PowerFactor_Qu_QuResponse	R	PowerFactor_Qu_QuRes	0.1	uint16	1
0x0039	PowerFactor_Qu_K	R	PowerFactor_Qu_K	0.1	int16	1
0x003	PowerFactor_Qu_3Tau	R	PowerFactor_Qu_3Tau	1s	uint16	1

0x003	PowerFactor_Qu_QuDelayTim	R	PowerFactor_Qu_QuDel	1s	uint16	1
0x003 C	PowerFactor_Qu_QuLockEn	R	PowerFactor_Qu_QuLoc	1	uint16	1
			0:Disable 1::Enable			
0x003	PowerFactor_Qu_QuLockIn	R	PowerFactor_Qu_QuLoc	1%	uint16	1
0x003	PowerFactor_Qu_QuLockOut	R	PowerFactor_Qu_QuLoc	1%	uint16	1
0x003	PowerFactor_FixQPower	R	PowerFactor_FixQPower	1Va	int16	1
0x0040	PowerFactor_FixQPower_Max	R	PowerFactor_FixQPower	1Va	int16	1
0x0041	PowerFactor_FixQPower_Min	R	PowerFactor_FixQPower	1Va	int16	1
0x0042	wConnection_FL	R	Connection Low frequency	0.0 1Hz	int16	1
0x0043	wConnection_FH	R	Connection High frequency	0.0 1Hz	int16	1
0x0044	wConnection_VL	R	Connection Low voltage	0.1	int16	1
0x0045	wConnection_VH	R	Connection High voltage	0.1	int16	1
0x0046	wConnection_ObserveT	R	Connection Observation	1S	int16	1
0x0047	wConnection_GradientEn	R	Connection Gradient	1	int16	1
0x0048	wReconnection_FL	R	Reconnection Low frequency	0.0 1HZ	int16	1
0x0049	wReconnection_FH	R	Reconnection High frequency	0.0 1Hz	int16	1
0x004	wReconnection_VL	R	Reconnection Low	0.1	int16	1
0x004	wReconnection_VH	R	Reconnection High	0.1	int16	1
0x004	wReconnection_ObserveT	R	Reconnection	1S	int16	1
0x004	wReconnection_GradientEn	R	Reconnection Gradient	1	int16	1
0x004	wReconnection_Gradient	R	Reconnection Gradient	1%	int16	1
0x004 ~0x007	Reserv	R	-	-	uint16	59
0x007	FirmwareVersion_DSP_Minor	R	FirmwareVersion_DSP_	1	uint16	1
0x007	HardwareVersion_DSP	R	HardwareVersion_DSP	1	uint16	1
0x007	FirmwareVersion_DSP_Major	R	FirmwareVersion_DSP_	1	uint16	1
0x0080	FirmwareVersion_ARM_Major	R	FirmwareVersion_ARM_	1	uint16	1
0x0081	Rev					
0x0082	FirmwareVersion_ModbusRTU	R	Current version matches FirmwareVersion_ARM	1	uint16	1
0x0083	FirmwareVersion_ARM_Minor	R	FirmwareVersion_ARM_	1	uint16	1
0x0084	FirmwareVersion_ARM_Bootlo	R	FirmwareVersion_ARM_	1	uint16	1

0x0085	RTC-Seconds	R	RTC-Seconds	—	uint16	1
0x0086	RTC-Minutes	R	RTC-Minutes	—	uint16	1
0x0087	RTC-Hours	R	RTC-Hours	—	uint16	1
0x0088	RTC-Days	R	RTC-Days	—	uint16	1
0x0089	RTC-Months	R	RTC-Months	—	uint16	1
0x008A	RTC-Years	R	RTC-Years	—	uint16	1
0x008B	SolarChargerUseMode	R	SolarChargerUseMode: 0:Self use mode 1: Feedin Priority 2:Back up mode 3:Manual mode 4: Peak Shaving 5: Tou Mode	1	uint16	1
0x008C	Manual mode	R	0:Stop charge&discharge 1:Force charge 2:Force discharge	1	uint16	1
0x008D	wBattery1_Type	R	0: Lead Acid 1: Lithium	1	uint16	1
0x008E	Charge_floatVolt	R	Lead-acid battery charge_float voltage	0.1 V	uint16	1
0x008F	Battery_DischargeCutVoltage	R	Lead-acid battery discharge	0.1 V	uint16	1
0x0090	Battery_ChargeMaxCurrent	R	Lead-acid battery charge maximum current	0.1 A	uint16	1
0x0091	Battery_DischargeMaxCurrent	R	Lead-acid battery discharge	0.1 A	uint16	1
0x0092	absorpt_voltage	R	Lead-acid battery absorpt_voltage	0.1 V	uint16	1
0x0093	SelfUse_Discharge_MinSoC	R	10%~100%	1%	uint8(Lo)	1
	SelfUse_NightCharge_Enable	R	Whether to allow	1	uint8(Lo)	
			from the grid			
		0:Disable 1:Enable				
0x0094	SelfUse_NightCharge_UpperSoC	R	This value will be enabled if SelfUse_NightCharge_Enable	1%	uint16	1
0x0095	Feedin_NightCharge_UpperSoC	R	10%~100%	1%	uint8(Lo)	1
	Feedin_Discharge_MinSoC	R	10%~100%	1%	uint8(Lo)	
0x0096	BackUp_NightCharge_UpperSoC	R	30%~100%	1%	uint8(Lo)	1
	BackUp_Discharge_MinSoC		30%~100%	1%	uint8(Lo)	
0x0097	ChargePeriod1_StartMinute	R	0-59	1M	uint8(Lo)	1
	ChargePeriod1_StartHour	R	0-23	1H	uint8(Lo)	

0x0098	ChargePeriod1_EndMinute	R	0-59	1M	uint8(1
	ChargePeriod1_EndHour	R	0-23	1H	uint8(
0x0099	DischargePeriod1_StartMinute	R	0-59	1M	uint8(1
	DischargePeriod1_StartHour	R	0-23	1H	uint8(
0x009A	DischargePeriod1_EndMinute	R	0-59	1M	uint8(1
	DischargePeriod1_EndHour	R	0-23	1H	uint8(
0x009B	Set_Chrg&DischrgPeriod2_Enabled	R	Whether to use period 2. 0:Disable 1:Enable	1	uint16	1
0x009C	ChargePeriod2_StartMinute	R	0-59	1M	uint8(1
	ChargePeriod2_StartHour	R	0-23	1H	uint8(
0x009D	ChargePeriod2_EndMinute	R	0-59	1M	uint8(1
	ChargePeriod2_EndHour	R	0-23	1H	uint8(
0x009E	DischargePeriod2_StartMinute	R	0-59	1M	uint8(1
	DischargePeriod2_StartHour	R	0-23	1H	uint8(
0x009F	DischargePeriod2_EndMinute	R	0-59	1M	uint8(1
	Discharge Period2_EndHour	R	0-23	1H	uint8(
0x00A0	EpsRestartSoc	R	10~100	1%	uint16	1
0x00A1	HotStandbyEN	R	0:enable 1:disable	1	uint16	1
0x00A2	ExtendBmsSetting	R	0:disable 1:enable	1	uint16	1
0x00A3	BatteryHeatingEn	R	0:disable 1:enable	-	uint16	1
0x00A4	HeatingPeriod1_StartMinute	R	0-59	1M	uint8(1
	HeatingPeriod1_StartHour	R	0-23	1H	uint8(
0x00A5	HeatingPeriod1_EndMinute	R	0-59	1M	uint8(1
	HeatingPeriod1_EndHour	R	0-23	1H	uint8(
0x00A6	HeatingPeriod2_StartMinute	R	0-59	1M	uint8(1
	HeatingPeriod2_StartHour	R	0-23	1H	uint8(
0x00A7	HeatingPeriod2_EndMinute	R	0-59	1M	uint8(1
	HeatingPeriod2_EndHour	R	0-23	1H	uint8(
0x00A8	wBatteryDischargeBackupVolta	R	wBatteryDischargeBacku	0.1	uint16	1
0x00A9	MatchResistanceSet(X3)	R	0:disable 1:enable	-	uint16	1
0x00AA	Registration Code (for external module)	R	Registration Code[10]	10char	uint16	1
0x00AB	ModBusRTU_Address	R	ModBusRTU_Address	1	uint16	1

0X03	0x00B0	ModBusRTU_BraudRate	R	0:115200 1:57600 2:56000 3:230400 4:19200	bit/s	uint16	1
	0x00B1	InvVoltZeroResultj(X3)	R	1:校准完成 其他: 校准失败	1	uint16	1
	0x00B2	PgridBias	R	0:Disable 1:Grid 2:INV	-	uint16	1
	0x00B3	FastCtCheckEn	R	0:disable 1:enable	1	uint16	1
	0x00B4	VPPExitIdleEn	R	0:Disable 1:Enable	1	uint16	1
	0x00B5	Factorylimit	R	Factorylimit	1W	uint16	1
	0x00B6	Export control user limit	R	Export_control user limit	1W(X1) 10W(X2)	uint16	1
	0x00B7	Off-grid_Mute	R	0(off)/1(on)	1	uint16	1
	0x00B8	Off-grid_MinSoC	R	Off-grid_MinSoC	1%	uint16	1
	0x00B9	Off-grid Frequncy	R	Off-grid Frequncy	1	uint16	1
	0x00BA	Inverter Power Type	R	X1G4: 3000/3680/5000 /6000/7500 X3G4: 15K/12K/10k/8K /6K/5K	1W	uint16	1
	0x00BB	Language	R	0:English 1:German 2:French 3:Polish 4:Spanish 5:Portuguese 6:Italian	0~5	uint16	1
	0x00BC	EnableMPPT	R	1:enable 0:Disable	0/1	uint16	1
	0x00BD	wTuvp_L2	R	wTuvp_L2	1ms(X1) 10ms(X2)	uint16	1
	0x00BE	wTovp_L2	R	wTovp_L2	1ms(X1) 10ms(X2)	uint16	1
	0x00BF	wTufp_L2	R	wTufp_L2	1ms(X1) 10ms(X2)	uint16	1
0x00C0	wTofp_L2	R	wTofp_L2	1ms(X1) 10ms(X2)	uint16	1	
0x00C1	wTuvp_L1	R	wTuvp_L1	1ms(X1) 10ms(X2)	uint16	1	

0x00C2	wTovp_L1	R	wTovp_L1	1ms (X1) 10ms (X2)	uint16	1
0x00C3	wTufp_L1	R	wTufp_L1	1ms (X1) 10ms (X2)	uint16	1
0x00C4	wTofp_L1	R	wTofp_L1	1ms (X1) 10ms (X2)	uint16	1
0x00C5	TestStep	R	TestStep 1 means test Ovp(59.S2) 2 means test Uvp(27.S1) 3 means test Uvp(27.S2) 4 means test Ofp(81>.S1) 5 means test Ufp(81<.S1) 6 means test Ofp2(81>.S2) 7 means test Ufp2(81<.S2) 8 means test Ovp_10(59.S1) 9 means success	1~8	uint16	1
0x00C6	OvpValue(Ovp(59.S2))	R		0.1V	uint16	1
0x00C7	OvpTime(Ovp(59.S2))	R		1ms	uint16	1
0x00C8	UvpValue(Uvp(27.S1))	R		0.1V	uint16	1
0x00C9	UvpTime(Uvp(27.S1))	R		1ms	uint16	1
0x00CA	OfpValue(Ofp(81>.S1))	R		0.01Hz	uint16	1
0x00CB	OfpTime(Ofp(81>.S1))	R		1ms	uint16	1
0x00CC	UfpValue(Ufp(81<.S1))	R		0.01Hz	uint16	1
0x00CD	UfpTime(Ufp(81<.S1))	R		1ms	uint16	1
0x00CE	SelfTestOvp10mAvgVal (Ovp_10(59.S1))	R		0.1V	uint16	1
0x00CF	SelfTestOvp10mAvgTime (Ovp_10(59.S1))	R		1S	uint16	1
0x00D0	SelfTestOfpVal_Restrictive (Ofp2(81>.S2))	R		0.01Hz	uint16	1
0x00D1	SelfTestOfpTime_Restrictive (Ofp2(81>.S2))	R		1ms	uint16	1
0x00D2	SelfTestUfpVal_Restrictive (Ufp2(81<.S2))	R		0.01Hz	uint16	1
0x00D3	SelfTestUfpTime_Restrictive (Ufp2(81<.S2))	R		1ms	uint16	1
0x00D4	SelfTest_UvpRestrictive_Val (Uvp(27.S2))	R		0.1V	uint16	1
0x00D5	SelfTest_UvpRestrictive_Time (Uvp(27.S2))	R	1ms	uint16	1	
0x00D6	SelfTest_Time	R	1s	uint16	1	
0x00D7	MainBreakerCurrentLimit	R	32A~100A	1A	uint16	1

0x00D8	PfLockInPoint	R	Set Power Factor parameter	105~110	uint16	1
0x00D9	PfLockOutPoint	R		98~100	uint16	1
0x00DA	wInverter_OutPut_Switch	R	1=ON;0=Off	0/1	uint16	1
0x00DB	OFPL_Point	R	Overfrequency load reduction point.	0.0~110Hz	uint16	1
0x00DC	OFPL_SetRate	R	Overfrequency load reduction rate	1%	uint16	1
0x00DD	OFPL_DelayTime	R	Overfrequency load reduction delay time	1ms	uint16	1
0x00DE	OFPL_fstop_disch	W	OFPL_fstop_disch	0.0~110Hz	uint16	1
0x00DF	OFPL_fPmin	W	OFPL_fPmin	0.0~110Hz	uint16	1
0x00E0	UserPassword	R	UserPassword	1	uint16	1
0x00E1	AdvancePassword	R	AdvancePassword	1	uint16	1
0x00E2	UFPL_Point	R	Underfrequency load increase point.	0.0~110Hz	uint16	1
0x00E3	UFPL_SetRate	R	Underfrequency load increase rate	1%	uint16	1
0x00E4	UFPL_DelayTime	R	Underfrequency load increase delay time	1ms	uint16	1
0x00E5	OFPL_CurveType	R	Overfrequency load reduction curve type selection. 0:Symmetry curve	0/1	uint16	1
0x00E6	OFPL_Tstop	R	Overfrequency load reduction asymmetry	1s	uint16	1
0x00E7	OFPL_RemovePoint	R	Overfrequency load reduction frequency	0.0~110Hz	uint16	1
0x00E8	UFPL_RemovePoint	R	Underfrequency load increase frequency	0.0~110Hz	uint16	1
0x00E9	ExportSoftLimitEn	R	ExportSoftLimitEn	-	uint16	1
0x00EA	ExportHardLimitEn	R	ExportHardLimitEn	-	uint16	1
0x00EB	GeneralSoftLimitEn	R	GeneralSoftLimitEn	-	uint16	1
0x00EC	GeneralHardLimitEn	R	GeneralHardLimitEn	-	uint16	1
0x00ED	wAcPowerLimit	R	wAcPowerLimit	1VA(X1)~10VA(X2)	uint16	1
0x00EE	ConnectSlop(X3)	R	ConnectSlop	1%	uint16	1
0x00EF	ReconnectSlop(X3)	R	ReconnectSlop	1%	uint16	1

0x00F0	HardExportPower	R	HardExportPower	1W(X1) 10W(X2)	uint16	1
0x00F1	HardAcPowerLimit	R	HardAcPowerLimit	1VA(X1) 10VA(X2)	uint16	1
0x00F2	SetpointTimeout	R	SetpointTimeout	1ms	uint16	1
0x00F3	wPowerLimitGra	R	wPowerLimitGra	0.0	uint16	1
0x00F4	PuFunc_VoltResponse_V2	R	PuFunction Voltage	0.1	uint16	1
0x00F5	PuFunc_VoltResponse_V3	R		0.1	uint16	1
0x00F6	PuFunc_VoltResponse_V4	R		0.1	uint16	1
0x00F7	PuFunc_VoltResponse_V1	R		0.1	uint16	1
0x00F8	PuFunc_3Tau	R	PuFunc_3Tau	0.0	uint16	1
0x00F9	PUFuncEnable	R	0:disable 1:enable	1	uint16	1
0x00FA	SetPuPower1	R	SetPuPower1	1%	uint16	1
0x00FB	SetPuPower2	R	SetPuPower2	1%	uint16	1
0x00FC	SetPuPower3	R	SetPuPower3	1%	uint16	1
0x00FD	SetPuPower4	R	SetPuPower4	1%	uint16	1
0x00FE	Rev					
0x00FF	Pu_Tpye	R	Pu_Tpye	1	uint16	1
0x0100	UFPL_fstop_ch	R	UFPL_fstop_ch	0.0 1Hz	uint16	1
0x0101	UFPL_fPmax	R	UFPL_fPmax	0.0 1Hz	uint16	1
0x0102	DRMFunctionEnable	R	0:disable 1:enable	1	uint16	1
0x0103	CtType (X3)	R	0:100A 1:200A	1	uint16	1
0x0104	wShadowFixFuncEnable	R	0:Off, 1:Low, 2:Middle, 3:High	1	uint16	1
0x0105	MachineType_X1orX3	R	1:X1 3:X3	-	uint16	1
0x0106	PhasePowerBalance(X3)	R	0:disable 1:enable	1	uint16	1
0x0107	wMachineStyle	R	0:X-Hybrid 1:X-FIT	1	uint16	1
0x0108	MeterFunction	R	0:disable 1:enable	1	uint16	1
0x0109	Meter1ID	R	Meter1ID 1~200	1	uint16	1
0x010A	Meter2ID	R	Meter2ID 1~200	1	uint16	1
0x010B	DirectionMeterCT1	R	0:Positive 1:Negative	1	uint16	1

0x010	DirectionMeter2	R	0:Positive 1:Negative	1	uint16	1
0x010	ExternalInv	R	0:Enable1:Disable	1	uint16	1
0x010	BatteryChargeMaxSoc	R	Charger upper limit	1%	uint16	1
0x010	bBatterToEVCharge	R	0:Enable1:Disable	1	uint16	1
0x0110	InPutDI1	R	0:低电平 1:高电平	1	uint16	1
0x0111	DischCutOffPoint_DifferentEN	R	Whether Lead-acid Battery discharge cut-off voltage point is enable. 0:disable 1:enable	1	uint16	1
0x0112	REV	R	-	-	uint16	1
0x0113	DischCutOffVoltage_GridMode	R	Lead-acid Battery discharge cut-off voltage	0.1 V	uint16	1
0x0114	ShadowFixFuncEnable2	R	-0:Off, 1:Low, 2:Middle,	1	uint16	1
0x0115	Meter/CT select	R	0:Meter 1:CT	1	uint16	1
0x0116	FVRT_Function	R	0:Disable 1:Enable	1	uint16	1
0x0117	FVRT_VacUpper	R	If FVRT_Function is enable, FVRT Vac upper	0.1 V	uint16	1
0x0118	FVRT_VacLower	R	If FVRT_Function is enable, FVRT Vac lower	0.1 V	uint16	1
0x0119	REV	R	-	-	uint16	1
0x011	REV	R	-	-	uint16	1
0x011	bPVConnectionMode(X1)	R	PV connection.	1	uint16	1
0x011	ShutDown(X1)	R	0:Disable 1:Enable	1	uint16	1
0x011	MicroGrid(X1)	R	0:Disable 1:Enable	1	uint16	1
0x011	SelfuseModeBackupEn	R	0:Disable 1:Enable	1	uint16	1
0x011F	bSelfUse_BackupSoc	R	10~100	1%	uint16	1
0x0120	bLeaseModeEnable	R	0:Disable 1:Enable	1	uint16	1
0x0121	bDeviceLockFlag	R	0:Disable 1:Enable	1	uint16	1
0x0122	ManualModeControl	R	0:OFF 1:ON	1	uint16	1
0x0123	FeedinOnPower	R	Grid connected pull in power point	1W	uint16	1
0x0124	bSwitchOnSoc	R	SOC trigger point of pull in action	1%	uint16	1
0x0125	ConsumeOffPower	R	Power consumption off trigger point	1W	uint16	1
0x0126	bSwitchOffSoc	R	SOC trigger point of breaking action	1%	uint16	1
0x0127	MinimumPerOnSignal	R	Minimum duration of single pull in	1min	uint16	1

0x0128	MaximumPerDayOn	R	Maximum cumulative pickup time of the day		uint16	1
0x0129	bScheduleEnable	R	0:Disable 1:Enable	1	uint16	1
0x012A	bP1_StartMinute	R	0-59	1	uint8(Hi)	1
	bP1_StartHour	R	0-23	1	uint8(Hi)	
0x012B	bP1_StopMinute	R	0-59	1	uint8(Hi)	1
	bP1_StopHour	R	0-23	1	uint8(Hi)	
0x012C	bP2_StartMinute	R	0-59	1	uint8(Hi)	1
	bP2_StartHour	R	0-23	1	uint8(Hi)	
0x012D	bP2_StopMinute	R	0-59	1	uint8(Hi)	1
	bP2_StopHour	R	0-23	1	uint8(Hi)	
0x012E	WorkMode	R	0:Disable 1:manual	1	uint16	1
0x012F	DryContactMode	R	0:Load Management 1:Generator Control	1	uint16	1
0x0130	Parallel Setting	R	0:Free 1: Master 2:Slave	1	uint16	1
0x0131	ExternalGenEn	R	0:Disable 1:ATS Control 2:Dry Contact	1	uint16	1
0x0132	ExternalGenMaxCharge	R	ExternalGenMaxCharge	1W(X1) 10 W(X2)	uint16	1
0x0133 ~0x0133	Rev					
0x013E	485CommFunSelect	R	0:modbus 485 1:EV Charge 2:DadaHub 3:AdaptBoxG2 4: EVC& AdaptBoxG2 5: AdaptBoxG2 & Meter	1	uint16	1
0x013F	Rev					
0x0140	Start Gen Method	R	0:reference soc 1:immediately	1	uint16	1
0x0141	Switch on SoC	R	Switch on SoC(reference soc.)	1%	uint16	1
0x0142	Switch off SoC	R	Switch off SoC(reference soc.)	1%	uint16	1
0x0143	MaxRunTime	R	MaxRunTime	1Min	uint16	1
0x0144	Rev	R				
0x0145	MinRestTime	R	MinRestTime	1Min	uint16	1
0x0146	Allow Work start time Minute	R	Allow Work start time Minute	1M	uint8(Hi)	1

0x0146	Allow Work start time Hour	R	Allow Work start time Hour	1H	uint8(Lo)	1
0x0147	Allow Work stop time Minute	R	Allow Work start time Minute	1M	uint8(Hi)	1
	Allow Work stop time Hour	R	Allow Work start time Hour	1H	uint8(Lo)	1
0x0148	GenMinPower		0~60000	1W	uint16	1
0x0149 ~0x014E	Rev					
0x014F	PeakShavingDischarPeriod.bP1_StartMinute	R	0-59	1M	uint8(Hi)	
	PeakShavingDischarPeriod.bP1_StartHour	R	0-23	1H	uint8(Lo)	
0x0150	PeakShavingDischarPeriod.bP1_StopMinute	R	0-59	1M	uint8(Hi)	
	PeakShavingDischarPeriod.bP1_StopHour	R	0-23	1H	uint8(Lo)	
0x0151	PeakShavingDischarPeriod.bP2_StartMinute	R	0-59	1M	uint8(Hi)	
	PeakShavingDischarPeriod.bP2_StartHour	R	0-23	1H	uint8(Lo)	
0x0152	PeakShavingDischarPeriod.bP2_StopMinute	R	0-59	1M	uint8(Hi)	
	PeakShavingDischarPeriod.bP2_StopHour	R	0-23	1H	uint8(Lo)	
0x0153	PeakShaving.PeriodBPeakLimits1	R	Peak Shaving Mode Discharge Period 1 Peak Limits	1W	uint8(Lo)	
0x0154	PeakShaving.PeriodDPeakLimits2	R	Peak Shaving Mode Discharge Period 2 Peak Limits	1W	uint16	
0x0155	PeakShaving.PeriodAChargeFromGridEn	R	From Grid charging switch	1	uint16	
0x0156	PeakShaving.PeriodAChargePowerLimits	R	Charging power value from grid	1W	uint16	1
0x0157	PeakShaving.PeriodAMax_SOC	R	Maximum SOC charged from grid	1%	uint16	1
0x0158	PeakShaving.PeriodCReserved_SOC	R	Peak shaving mode reserved SOC	1%	uint16	1
0x0159	Rev					
0x015A	Rev					
0x015B	Rev					
0x015C	EVChargerAddr	R	0~255	1	uint16	1
0x015D	Rev					
0x015E	AdaptBoxG2Addr	R	0~255	1	uint16	1
0x015F	Rev					

0x0160	CTFalutEn	R	Cycle detection CT enable switch 0:Disable 1:Enable	1	uint16	1
0x0161	u16SuperBuckUpEn	R	Enable switch for EPS mode without battery 0:Disable 1:Enable	1	uint16	1
0x0162	GenCharge_StartMinute	R	0-59	1M	uint8(L)	1
	GenCharge_StartHour	R	0-23	1H	uint8(L)	1
0x0163	GenCharge_EndMinute	R	0-59	1M	uint8(L)	1
	GenCharge_EndHour	R	0-23	1H	uint8(L)	1
0x0164	GenDischarge_EndMinute	R	0-59	1M	uint8(L)	1
	GenDischarge_StartHour	R	0-23	1H	uint8(L)	1
0x0165	GenDischarge_EndMinute	R	0-59	1M	uint8(L)	1
	GenDischarge_StartHour	R	0-23	1H	uint8(L)	1
0x0166	GenP2_SetEnable	R	0:Disable 1:Enable	1	uint16	1
0x0167	GenP2Charge_StartMinute	R	0-59	1M	uint8(L)	1
	GenP2Charge_StartHour	R	0-23	1H	uint8(L)	1
0x0168	GenP2Charge_EndMinute	R	0-59	1M	uint8(L)	1
	GenP2Charge_EndHour	R	0-23	1H	uint8(L)	1
0x0169	GenP2Discharge_EndMinute	R	0-59	1M	uint8(L)	1
	GenP2Discharge_StartHour	R	0-23	1H	uint8(L)	1
0x016A	GenP2Discharge_EndMinute	R	0-59	1M	uint8(L)	1
	GenP2Discharge_StartHour	R	0-23	1H	uint8(L)	1
0x016B	ChargeFromGenEnable	R	0:Disable 1:Enable	1	uint16	1
0x016C	ChargeFromGen_ChargeSoC	R	10~100	1%	uint16	1
0x016D	FastInEPSEn	R	0:Disable 1:Enable	1	uint8(L)	1
0x016E	TOUMode_TotalMinSoc	R	10~100	1%	uint8(L)	1
	TOUMode_WorkMode	R	0xA0: SelfUse 0xA1: AllowCharging 0xA2: ForceDischarging 0xA3: BatteryOff 0xA4: PeakShaving	1	uint8(Hi)	1
0x16F	TOUMode_SelfuseMinSOC	R	10~100	1%	uint16	1
0x170	TOUMode_ChargeFromGridEn	R	0xA0:Disable 0xA1:Enable	1	uint8(L)	1
	TOUMode_ChargeStopSOC	R	10~100	1%	uint8(L)	1
0x171	TOUMode_DischgPowerLimitRate	R	0~100	1%	uint8(L)	1



0x171	TOUMode_DischargeMinSOC	R	10~100	1%	uint8(1bit)	1
0x172	TOUMode_PeakShavingLimit	R	-	1w	Uint32	2
0x173						
0x174	bShotoffEn (X3)	R	0: NO 1: NC(取反)	1	uint16	1
0x175	PowerFactor_Qu_VoltRatio2	R	PowerFactor_Qu_VoltRatio2	1%	uint16	1
0x176	PowerFactor_Qu_VoltRatio3	R	PowerFactor_Qu_VoltRatio3	1%	uint16	1



Table 1-1 Data format description



Master request format		
	Bytes number	Content format
Slave ID	1 byte	0x00~0xFF (Inverter default 0x01)
Function code	1 byte	0x03
Start register address	2 byte Address MSB Address LSB	0x0000-0xFFFF
Register number	2byte Data MSB Data LSB	N
CRC	2byte CRC MSB CRC MSB	
Slave normal response		
Slave ID	1 byte	0x00~0xFF (Inverter default 0x01)
Function code	1 byte	0x03
Byte number	1 byte Data	2*N
Register date	N*2byte Data MSB Data LSB	
CRC	2byte CRC MSB CRC MSB	
Slave fault response		
Slave ID	1byte	0x00~0xFF (Inverter default 0x01)
Fault code	1byte	0x83
Abnormal code	1byte	0x01 or 0x02 or 0x03 or 0x04
CRC	2byte CRC MSB CRC MSB	



Example: read InverterSN(register:0x0000~0x006).

Master request: 01 03 00 00 00 07 04 08

Slave response: 01 03 0E 48 34 37 35 32 32 5A 48 45 4E 47 57 45 4E 63 26

0x03:Read Holding Register (BMS Info)

Function code	Read Input Register(BMS Info)						
	register	variable	W/R	decription	unit	data forma	len th
0x03	0x0200	Subsystem_Num	R	Subsystem_Num	1	Uint16	1
	0x0201	BMS_MasterVersion	R	Version type describe x.y x = Uint8(Hi) y = Uint8(Low)	1	Uint16	1
	0x0202	BMS_Slave1Version	R		1	Uint16	1
	0x0203	BMS_Slave2Version	R		1	Uint16	1
	0x0204	BMS_Slave3Version	R		1	Uint16	1
	0x0205	BMS_Slave4Version	R		1	Uint16	1
	0x0206	BMS_Slave5Version	R		1	Uint16	1
	0x0207	BMS_Slave6Version	R		1	Uint16	1
	0x0208	BMS_Slave7Version	R		1	Uint16	1
	0x0209	BMS_Slave8Version	R		1	Uint16	1
	0x020A~0x020F	masterSN	R	masterSN	1	14char	7
	0x0211~0x0217	slave1_2SN	R	slave1_2SN	1	14char	7
	0x0218~0x021D	slave3_4SN	R	slave3_4SN	1	14char	7
	0x021E~0x0223	slave5_6SN	R	slave5_6SN	1	14char	7
	0x0224~0x0229	Slave7_8SN	R	Slave7_8SN	1	14char	7



0x03:Read Holding Register (Data Hub)

Function code	Read Holding Register(Data Hub)						
	register	variable	W/R	decription	unit	data forma	lenth
0x03	0x3098~0x30A	ReadBlockCheckResult	R	DataHub Upgrade results	1	Uint16	/
	0x30AA~0x30F00	Rev					
	0xF000	SetLength	R	number of Set item	1	Uint16	1
	0xF001	ReadSetValue	R	value of each setting item	/	Uint16	/

Note: Only for internal device communication

0x04:Read Input Register

32bit data use little endian format

Function code	Read Input Register						
	Register	Variable	W/R	Decription	Unit	Data	Le nth
0x04	0x0000	GridVoltage(X1)	R	GridVoltage	0.1V	uint16	1
	0x0001	GridCurrent(X1)	R	GridCurrent	0.1A	int16	1
	0x0002	GridPower(X1)	R	GridPower	1W	int16	1
	0x0003	PvVoltage1	R	PvVoltage1	0.1V	uint16	1
	0x0004	PvVoltage2	R	PvVoltage2	0.1V	uint16	1
	0x0005	PvCurrent1	R	PvCurrent1	0.1A	uint16	1
	0x0006	PvCurrent2	R	PvCurrent2	0.1A	uint16	1
	0x0007	GridFrequency(X1)	R	GridFrequency	0.01	uint16	1
	0x0008	Temperature	R	radiator temperature	1°C	int16	1
	0x0009	RunMode	R	Table 2-2 Run mode description	—	uint16	1
	0x000A	Powerdc1	R	Powerdc1	1W	uint16	1
	0x000B	Powerdc2	R	Powerdc2	1W	uint16	1
	0x000C	TemperFaultValue	R	TemperFaultValue	1°C	int16	1
	0x000D	Pv1VoltFaultValue	R	Pv1VoltFaultValue	0.1V	uint16	1
	0x000E	Pv2VoltFaultValue	R	Pv2VoltFaultValue	0.1V	uint16	1

0x00	GfciFaultValue	R	GfciFaultValue	1mA	uint	1
0x00	GridVoltFaultValue	R	GridVoltFaultValue	0.1V	uint	1
0x001	GridFreqFaultValueT	R	GridFreqFaultValueT	0.01	uint	1
0x00	DciFaultValue	R	DciFaultValue	1mA	uint	1
0x00	TimeCountDown	R	TimeCountDown	1ms	uint	1
0x00	BatVoltage_Charge1	R	BatVoltage_Charge1	0.1V	int1	1
0x00	BatCurrent_Charge1	R	BatCurrent_Charge1	0.1A	int1	1
0x00	Batpower_Charge1	R	Batpower_Charge1	1W	int1	1
0x00 17	BMS_Connect_State	R	0:Disconnected 1:Connected	-	uint 16	1
0x00	TemperatureBat	R	TemperatureBat	1°C	int1	1
0x00 19	BDCStatus	R	0: discharge 1: charge	-	uint 16	1
0x00	GridStatus	R	0: OnGrid 1: OffGrid	-	uint	1
0x00	MPPTCount	R	MPPTCount	1	uint	1
0x00	Battery Capacity	R	Battery capacity	1%	uint	1
0x00	OutputEnergy_Charg	R	OutputEnergy_Charg	0.1k	uint	1
0x00	OutputEnergy_Charg	R	OutputEnergy_Charg	0.1k	uint	1
0x00	REV					
0x00	OutputEnergy_Charg	R	OutputEnergy_Charg	0.1k	uint	1
0x00	InputEnergy_Charge.	R	InputEnergy_Charge	0.1k	uint	1
0x00	InputEnergy_Charge.	R	InputEnergy_Charge	0.1k	uint	1
0x00	InputEnergy_Charge_	R	InputEnergy_Charge	0.1k	uint	1
0x00 24	BMS ChargeMaxCurrent	R	BMS ChargeMaxCurrent	0.1A	uint 16	1
0x00 25	BMS DischargeMaxCurrent	R	BMS DischargeMaxCurren	0.1A	uint 16	1
0x00 26	BMS_BatteryCapacity	R	BMS_BatteryCapacit y	Wh	uint 16	1
0x00 28						
0x00	PCSMajorFault	R	PCSMajorFault	-	uint	1
0x00	BatteryMajorFault	R	BatteryMajorFault	-	uint	1
0x00	InvFaultMessage.LSB	R	Inverter error code	-	uint	1

0x00	InvFaultMessage.MS	R	X1:Table2-4 X3:Table2-3	-	uint	1
0x00	REV	R	REV	-	uint	1
0x00	Mgr FaultMessage	R	Table 2-5 Manager error code	-	uint	16
0x00	Bat_BMS_FaultMessa	R	Table 2-6 BMS error code	-	uint	1
0x00	Bat_BMS_FaultMessa	R		-	uint	1
0x00	feedin_power	R	Feedin power is obtained from Meter or CT. (Postive mean generate power; Negative mean consumed	1W	int32	2
0x00						
0x00	feedin_energy_total(meter)	R	energy to the grid (0x48:LSB,0x49:MSB)	0.01kWh	uint	32
0x00						
0x00	consum_energy_total(meter)	R	energy form the grid (0x4A:LSB,0x4B:MSB)	0.01kWh	uint	32
0x00						
0x00	Off-gridVoltage(X1)	R	Off-grid Voltage	0.1V	uint	1
0x00	Off-gridCurrent(X1)	R	Off-grid Current	0.1A	uint	1
0x00	Off-gridPower(X1)	R	Off-grid power	1VA	uint	1
0x00	Off-gridFrequency(X1)	R	Off-grid _Frequency	0.01	uint	1
0x00	Etoday_togrid	R	Today Energy (Inverter AC Port)	0.1kWh	uint	16
0x00	Rev	R	Rev	-	uint	1
0x00	Etotal_togrid	R	Total Energy (Inverter AC Port) (0x52:LSB,0x53:MSB)	0.1kWh	uint	32
0x00						
0x00	Lock State	R	0:locked 1:unlocked	-	uint	1
0x00	REV	R	REV	-	uint	16
~0x0						
0x00	BusVolt	R	BusVolt	0.1V	uint	1
0x00	wDcvFaultVal	R	wDcvFaultVal	0.1V	uint	1
0x00	wOverLoadFaultval	R	wOverLoadFaultval	1W	uint	1
0x00	wBatteryVoltFaultVal	R	wBatteryVoltFaultVal	0.1V	uint	1
0x00	GridVoltage_R(X3)	R	GridVoltage_R	0.1V	uint	1
0x00	GridCurrent_R(X3)	R	GridCurrent_R	0.1A	int1	1
0x00	GridPower_R(X3)	R	GridPower_R	1W	int1	1

0X04	0x00	GridFrequency_R(X3)	R	GridFrequency_R	0.01	uint	1
	0x00	GridVoltage_S(X3)	R	GridVoltage_S	0.1V	uint	1
	0x00	GridCurrent_S(X3)	R	GridCurrent_S	0.1A	int1	1
	0x00	GridPower_S(X3)	R	GridPower_S	1W	int1	1
	0x00	GridFrequency_S(X3)	R	GridFrequency_S	0.01	uint	1
	0x00	GridVoltage_T(X3)	R	GridVoltage_T	0.1V	uint	1
	0x00	GridCurrent_T(X3)	R	GridCurrent_T	0.1A	int1	1
	0x00	GridPower_T(X3)	R	GridPower_T	1W	int1	1
	0x00	GridFrequency_T(X3)	R	GridFrequency_T	0.01	uint	1
	0x00	Off-grid_Volt_R(X3)	R	Off-grid_Volt_R	0.1V	uint	1
	0x00	Off- gridCurrent_R(X3)	R	Off-grid_Current_R	0.1A	uint	1
	0x00	Off- gridPowerR(X3)	R	Off- gridPowerR	1W	int1	1
	0x00	Off- gridPowerS_R(X3)	R	Off-grid_PowerS_R	1VA	uint	1
	0x00	Off-grid_Volt_S(X3)	R	Off-grid_Volt_S	0.1V	uint	1
	0x00	Off- gridCurrent_S(X3)	R	Off-grid_Current_S	0.1A	uint	1
	0x00 7C	Off- gridPowerActive S(X3)	R	Off- gridPowerActive S	1W	int1 6	1
	0x00	Off-gridPowerS_S(X3)	R	Off-gridPowerS_S	1VA	uint	1
	0x00	Off-grid_Volt_T(X3)	R	Off-grid_Volt_T	0.1V	uint	1
	0x00	Off- gridCurrent_T(X3)	R	Off-grid_Current_T	0.1A	uint	1
	0x00	Off- gridPowerT(X3)	R	Off- gridPowerT	1W	int1	1
	0x00	Off-gridPowerS_T(X3)	R	Off-gridPowerS_T	1VA	uint	1
	0x00 82 ~0x0 83	FeedinPower_Rphase (X3)	R	FeedinPower_Rphas e (meter/CT)	1W	int3 2	2
	0x00 84 ~0x0 85	FeedinPower_Sphase (X3)	R	FeedinPower_Sphas e (meter/CT)	1W	int3 2	2
	0x00 86 ~0x0 87	FeedinPower_Tphase (X3)	R	FeedinPower_Tphas e (meter/CT)	1W	int3 2	2
	0x00 88	On-gridRunTime	R	On-gridRunTime (0x88:LSB,0x89:MSB)	0.1h	int3 2	2
	0x00 8A	Off-gridRunTime	R	Off-gridRunTime (0x8A:LSB,0x8B:MSB)	0.1h	int3 2	2

0x008C	REV	R	REV	-	uint 16	2
0x008E	Off-gridYieldTotal	R	Off-gridYieldTotal (0x8E:LSB,0x8F:MSB)	0.1k Wh	uint 32	2
0x008F	Off-gridYieldToday	R	Off-gridYieldToday	0.1k Wh	uint 16	1
0x0091	EchargeToday	R	EchargeToday (Inverter AC Port)	0.1k Wh	uint 16	1
0x0092~0x0093	EchargeTotal	R	EchargeTotal (Inverter AC Port) (0x92:LSB,0x93:MSB)	0.1k Wh	uint 32	2
0x0094~0x0095	EnergyTotal	R	EnergyTotal (0x94:LSB,0x95:MSB)	0.1k Wh	uint 32	2
0x0096	SolarEnergyToday	R	SolarEnergyToday	0.1k Wh	uint 16	1
0x0097	REV	R	-	-	uint 16	1
0x0098~0x0099	feedin_energy_today	R	energy to the grid (meter) (0x98:LSB,0x99:MSB)	0.01k Wh	uint 32	2
0x009A~0x009B	consum_energy_today	R	energy form the grid (meter) (0x9A:LSB,0x9B:MSB)	0.01k Wh	uint 16	2
0x009C	InvVoltR(X3)	R	InvVoltR(X3)	0.1V	uint 16	2
0x009D	InvVoltS(X3)	R	InvVoltS(X3)	0.1V	uint 16	2
0x009E	InvVoltT(X3)	R	InvVoltT(X3)	0.1V	uint 16	2
0x009F~0x00A7	Rev	R	-	-	uint 16	12
0x00A8~0x00A9	feedin_power_Meter2	R	power to the grid (0xA8:LSB,0xA9:MSB)	1W	int32	2
0x00AA~0x00AB	feedin_energy_total_Meter2	R	energy to the grid (0xAA:LSB,0xAB:MSB)	0.01k Wh	uint 32	2
0x00AC~0x00AD	consum_energy_total_Meter2	R	energy form the grid (0xAC:LSB,0xAD:MSB)	0.01k Wh	uint 32	2
0x00AE~0x00AF	feedin_energy_today_Meter2	R	energy to the grid (0xAE:LSB,0xAF:MSB)	0.01k Wh	uint 16	2
0x00B0~0x00B1	consum_energy_today_Meter2	R	energy form the grid (0xB0:LSB,0xB1:MSB)	0.01k Wh	uint 16	2
0x00B2	FeedinPower_Rphase	R	FeedinPower_Rphase	1W	int32	2

0x00	_Meter2	R	FeedinPower_Sphase (X3) (0xB2:LSB,0xB3:MS)	1W	int32	2
0x00	FeedinPower_Sphase_Meter2	R	FeedinPower_Sphase (X3) (0xB4:LSB,0xB5:MS)	1W	int32	2
0x00	FeedinPower_Tphase_Meter2	R	FeedinPower_Tphase (X3) (0xB6:LSB,0xB7:MS)	1W	int32	2
0x00	Meter1Communication_Error	R	0:Com Error	1	uint16	1
0x00	Meter2Communication_Error	R	0:Com Error	1	uint16	1
0x00	Battery_Tem_High	R	Battery_Tem_High	0.1°C	int16	1
0x00	Battery_Tem_Low	R	Battery_Tem_Low	0.1°C	int16	1
0x00	Cell_Voltage_High	R	Cell_Voltage_High	0.001V	uint16	1
0x00	Cell_Voltage_Low	R	Cell_Voltage_Low	0.001V	uint16	1
0x00	BMS_UserSOC	R	BMS_UserSOC	1%	uint16	1
0x00	BMS_UserSOH	R	BMS_UserSOH	1%	uint16	1
0x00C0	GridReactivePower_Total_Meter	R	GridReactivePower_Total_Meter	1Var	int16	1
0x00C1	GridReactivePower_R_Meter	R	GridReactivePower_R_Meter	1Var	int16	1
0x00C2	GridReactivePower_S_Meter	R	GridReactivePower_S_Meter	1Var	int16	1
0x00C3	GridReactivePower_T_Meter	R	GridReactivePower_T_Meter	1Var	int16	1
0x00C4	GridPowerFactor_Total_Meter	R	GridPowerFactor_Total_Meter	0.01	int16	1
0x00C5	GridPowerFactor_R_Meter	R	GridPowerFactor_R_Meter	0.01	int16	1
0x00C6	GridPowerFactor_S_Meter	R	GridPowerFactor_S_Meter	0.01	int16	1
0x00C7	GridPowerFactor_T_Meter	R	GridPowerFactor_T_Meter	0.01	int16	1
0x00C8	GridFrequency_Meter	R	GridFrequency_Meter	0.01Hz	uint16	1
0x00C9	GridVoltage_Total_Meter	R	GridVoltage_Total_Meter	0.1V	uint16	1
0x00CA	GridVoltage_R_Meter	R	GridVoltage_R_Meter	0.1V	uint16	1
0x00CB	GridVoltage_S_Meter	R	GridVoltage_S_Meter	0.1V	uint16	1
0x00CC	GridVoltage_T_Meter	R	GridVoltage_T_Meter	0.1V	uint16	1
0x00CD	GridCurrent_Total_Meter	R	GridCurrent_Total_Meter	0.1A	int16	1
0x00CE	GridCurrent_R_Meter	R	GridCurrent_R_Meter	0.1A	int16	1
0x00CF	GridCurrent_S_Meter	R	GridCurrent_S_Meter	0.1A	int16	1
0x00D0	GridCurrent_T_Meter	R	GridCurrent_T_Meter	0.1A	int16	1

0x00D1	Rev	R	-	-	uint16	70
0x0100	ModbusPowerControl	R	0:disable remote control 1:enable power control 2:enable electric quantity control	1	uint16	1
0x0101	TargetFinishFlag	R	0:unfinished 1:finish	-	uint16	1
0x0102	ActivePowerTarget	R	ActivePowerTarget	1W	int32	2
0x0103						
0x0104	wReactivePowerTarget	R	wReactivePowerTarget	1Var	int32	2
0x0105						
0x0106	wActivePowerReal	R	wActivePowerReal (0x106:LSB,0x107:MSB)	1W	int32	2
0x0107						
0x0108	wReactivePowerReal	R	wReactivePowerReal (0x108:LSB,0x109:MSB)	1Var	int32	2
0x0109						
0x010A	wActivePower_Upper	R	wActivePower_Upper (0x10A:LSB,0x10B:MSB)	1W	int32	2
0x010B						
0x010C	wActivePower_Lower	R	wActivePower_Lower (0x10C:LSB,0x10D:MSB)	1W	int32	2
0x010D						
0x010E	wReactivePower_Upper	R	wReactivePower_Upper (0x10E:LSB,0x10F:MSB)	1Var	int32	2
0x010F						
0x0110	wReactivePower_Lower	R	wReactivePower_Lower (0x110:LSB,0x111:MSB)	1Var	int32	2
0x0111						
0x0112	TargetEnergy	R	TargetEnergy	1Wh	int32	2
0x0113						
0x0114	Charge_Discharge_Power	R	Charge_Discharge_Power (0x114:LSB,0x115:MSB)	1W	int32	2
0x0115						
0x0116	ChargeableElectricCapacity	R	ChargeableElectricCapacity (0x116:LSB,0x117:MSB)	1Wh	uint32	2
0x0117						
0x0118	DischargeableElectricCapacity	R	DischargeableElectricCapacity (0x118:LSB,0x119:MSB)	1Wh	uint32	2
0x0119						



0x01	Time_of_Duration	R	Time_of_Duration	1s	uint 16	1
0x01	TargetSoc	R	TargetSoc	1%	uint 16	1
0x01	SocUpper	R	SocUpper	1%	uint 16	1
0x01	SocLower	R	SocLower	1%	uint 16	1
0x01 1E	RemoteCtrlTimeOut	R	RemoteCtrlTimeOut (4~65535)	1s	uint 16	1
0x01	wBatteryForceCharge Flag	R	0:No Action 1:Force Charge	1	uint 16	1
0x01	wBMSRelayState	R	0:OFF 1:ON	1	uint 16	1
0x01	BMS_RestartFlag	R	0:Initial 1:Restert	1	uint 16	1
0x01						



Table 2-1 Data format description



Master request format		
	Bytes number	Content format
Slave ID	1 byte	0x00~0xFF (Inverter default 0x01)
Function code	1 byte	0x04
Start register address	2 byte Address MSB Address LSB	0x0000-0xFFFF
Register number	2byte Data MSB Data LSB	N
CRC	2byte CRC MSB CRC MSB	
Slave normal response		
Slave ID	1 byte	0x00~0xFF (Inverter default 0x01)
Function code	1 byte	0x04
Byte number	1 byte Data	2*N
Register date	N*2byte Data MSB Data LSB	
CRC	2byte CRC MSB CRC MSB	
Slave fault response		
Slave ID	1byte	0x00~0xFF (Inverter default 0x01)
Fault code	1byte	0x84
Abnormal code	1byte	0x01 or 0x02 or 0x03 or 0x04
CRC	2byte CRC MSB CRC MSB	



Example: read Mgr FaultMessage, Bat_BMS_FaultMessage (Register:0x0043~0x0045)

Master request: 01 04 00 43 00 03 41 DF

Slave response: 01 04 06 00 00 00 00 00 60 93



Table 2-2 Run mode description

Run mode	
Code	Description
0	Waiting
1	Checking
2	Normal
3	Fault
4	Permanent Fault
5	Update
6	Off-grid waiting
7	Off-grid
8	Self Testing
9	Idle
10	Standby

Table 2-3 Inverter error code(X3)

Inverter error code(X3)		
Byte num	Bit	Fault
BYTE0	BIT0	TZ Protect Fault
	BIT1	Grid Lost Fault
	BIT2	Grid Volt Fault
	BIT3	Grid Freq Fault
	BIT4	PV Volt Fault
	BIT5	Bus Volt Fault
	BIT6	Bat Volt Fault
	BIT7	AC10mins Volt Fault
BYTE1	BIT8	DCI OCP Fault
	BIT9	DCV OCP Fault
	BIT10	SW OCP Fault
	BIT11	RC OCP Fault
	BIT12	Isolation Fault
	BIT13	Temp Over Fault
	BIT14	BatConnDir Fault
	BIT15	Off-grid Overload
BYTE2	BIT16	Overload
	BIT17	Bat Power Low
	BIT18	BMS Lost
	BIT19	Fan Fault
	BIT20	Low Temp Fault
	BIT21	Parallel Fault
	BIT22	Hard Limit Fault
	BIT23	INV Volt Sample Fault
BYTE3	BIT24	Inner Comm Fault
	BIT25	INV EEPROM Fault
	BIT26	RCD Fault
	BIT27	Grid Relay Fault
	BIT28	Off-grid Relay Fault
	BIT29	PV ConnDir Fault



	BIT30	Charger Relay Fault
	BIT31	Earth Relay Fault

Table 2-4 Inverter error code(X1)

Inverter error code(X1)		
Byte num	Bit	Fault
BYTE0	BIT0	TZ Protect Fault
	BIT1	Grid Lost Fault
	BIT2	Grid Volt Fault
	BIT3	Grid Freq Fault
	BIT4	PV Volt Fault
	BIT5	Bus Volt Fault
	BIT6	Bat Volt Fault
	BIT7	AC10mins Volt Fault
BYTE1	BIT8	DCI OCP Fault
	BIT9	Reserve9
	BIT10	SW OCP Fault
	BIT11	RC OCP Fault
	BIT12	Isolation Fault
	BIT13	Temp Over Fault
	BIT14	BatConnDir Fault
	BIT15	Missed CT Fault
BYTE2	BIT16	Off-grid Overload Fault
	BIT17	Overload Fault
	BIT18	PV ConnDir Fault
	BIT19	Bat Power Low
	BIT20	Low Temp Fault
	BIT21	Parallel Fault
	BIT22	Charger Relay Fault
	BIT23	BMS Lost
BYTE3	BIT24	Inner Comm Fault
	BIT25	Fan Fault
	BIT26	Earth Relay Fault
	BIT27	INV EEPROM Fault
	BIT28	RCD Fault
	BIT29	Off-grid Relay Fault



	BIT30	Grid Relay Fault
	BIT31	Other Device Fault



Table 2-5 Manager error code

Manager error code		
Byte num	Bit	Fault
BYTE0	BIT0	Power Type Fault
	BIT1	Port OC Warning
	BIT2	Mgr EEPROM Fault
	BIT3	Reserve3
	BIT4	NTC Sample Invalid
	BIT5	Bat Temp Low
	BIT6	Bat Temp High
	BIT7	Reserve7
BYTE1	BIT8	Reserve8
	BIT9	Meter Fault
	BIT10	Bypass Relay Fault
	BIT11	Fan 2 Fault
	BIT12	Reserve12
	BIT13	Reserve13
	BIT14	Reserve14
	BIT15	Reserve15

Table 2-6 BMS warning code

BMS warning code		
Byte num	Bit	Fault
BYTE0	BIT0	BMS_External_Err
	BIT1	BMS_Internal_Err
	BIT2	BMS_OverVoltage
	BIT3	BMS_LowerVoltage
	BIT4	BMS_ChargeOCP
	BIT5	BMS_DischargeOCP
	BIT6	BMS_TemHigh
	BIT7	BMS_TemLow
BYTE1	BIT8	BMS_CellImbalance
	BIT9	BMS_Hardware_Protect
	BIT10	BMS_Circuit_Fault
	BIT11	BMS_ISO_Fault
	BIT12	BMS_VolSen_Fault
	BIT13	BMS_TempSen_Fault
	BIT14	BMS_CurSen_Fault
	BIT15	BMS_Relay_Fault
BYTE2	BIT16	BMS_Type_Unmatch
	BIT17	BMS_Ver_Unmathch
	BIT18	BMS_MFR_Unmathch
	BIT19	BMS_SW_Unmathch
	BIT20	BMS_M&S_Unmatch
	BIT21	BMS_CR_NORespond
	BIT22	BMS_SW_Protect
	BIT23	BMS_536_Fault
BYTE3	BIT24	BMS_SelfcheckErr
	BIT25	BMS_TempdiffErr
	BIT26	MS_BreakFault
	BIT27	BMS_Flash_Fault
	BIT28	BMS_Precharge_Fault



	BIT29	BMS_AirSwitch_Break
	BIT30	Rev
	BIT31	Rev

0x04:Read Input Register(Selftest)

32bit data use little endian format

Function code	Read Input Register(Selftest)						
	Register	Variable	W / R	Description	Unit	Data for	Length
	0x0180	wSelfTest_step	R	TestStep 1 means test Ovp(59.S2) 2 means test Uvp(27.S1) 3 means test Uvp(27.S2) 4 means test Ofp(81>.S1) 5 means test Ufp(81<.S1)	1	uint16	1
	0x0181	wSelfTest_Time	R	The remaining time of each test	1s	uint16	1
	0x0182	wSelfTest_State	R	bit0:OvpTestState bit1:UvpTestState bit2:Uvp_RestriTestState bit3:OfpTestState bit4:UfpTestState bit5:Ofp_RestriTestState bit6:Ufp_RestriTestState	1	uint16	1
	0x0183	Ovp_Threshold_Target	R		0.1V	uint16	1
	0x0184	Ovp_Threshold_Time	R		1ms	uint16	1
	0x0185	Ovp_Outcome_Sample_R	R		0.1V	uint16	1
	0x0186	Outcome_TripValue_R	R		0.1V	uint16	1
	0x0187	Ovp_Outcome_Time_R	R		1ms	uint16	1

0x0188	Ovp_Outcome_Sample_S(X3)	R	Ovp(59.S2)test	0.1V	uint16	1
0x0189	Ovp_Outcome_TripValue_S(X3)	R		0.1V	uint16	1
0x018A	Ovp_Outcome_Time_S(X3)	R		1ms	uint16	1
0x018B	Ovp_Outcome_Sample_T(X3)	R		0.1V	uint16	1
0x018C	Ovp_Outcome_TripValue_T(X3)	R		0.1V	uint16	1
0x018D	Ovp_Outcome_Time_T(X3)	R		1ms	uint16	1
0x018E	Uvp_Threshold_Target	R	Uvp(27.S1)test	0.1V	uint16	1
0x018F	Uvp_Threshold_Time	R		1ms	uint16	1
0x0190	Uvp_Outcome_Sample_R	R		0.1V	uint16	1
0x0191	Uvp_Outcome_TripValue_R	R		0.1V	uint16	1
0x0192	Uvp_Outcome_Time_R	R		1ms	uint16	1
0x0193	Uvp_Outcome_Sample_S(X3)	R		0.1V	uint16	1
0x0194	Uvp_Outcome_TripValue_S(X3)	R		0.1V	uint16	1
0x0195	Uvp_Outcome_Time_S(X3)	R		1ms	uint16	1
0x0196	Uvp_Outcome_Sample_T(X3)	R		0.1V	uint16	1
0x0197	Uvp_Outcome_TripValue_T(X3)	R		0.1V	uint16	1
0x0198	Uvp_Outcome_Time_T(X3)	R		1ms	uint16	1
0x0199	UvpRestric_Threshold_Target	R			0.1V	uint16
0x019A	UvpRestric_Threshold_Time	R	1ms		uint16	1
0x019B	UvpRestric_Outcome_Sample_R	R	0.1V		uint16	1

0x04	0x019C	UvpRestrict_Outcome_TripValue_R	R	Uvp(27.S2)test	0.1V	uint16	1
	0x019D	UvpRestrict_Outcome_Time_R	R		1ms	uint16	1
	0x019E	UvpRestrict_Outcome_Sample_S(X3)	R		0.1V	uint16	1
	0x019F	UvpRestrict_Outcome_TripValue_S(X3)	R		0.1V	uint16	1
	0x01A0	UvpRestrict_Outcome_Time_S(X3)	R		1ms	uint16	1
	0x01A1	UvpRestrict_Outcome_Sample_T(X3)	R		0.1V	uint16	1
	0x01A2	UvpRestrict_Outcome_TripValue_T(X3)	R		0.1V	uint16	1
	0x01A3	UvpRestrict_Outcome_Time_T(X3)	R		1ms	uint16	1
	0x01A4	Ofp_Threshold_Target	R		Ofp(81>.S1)test	0.01 Hz	uint16
	0x01A5	Ofp_Threshold_Time	R	1ms		uint16	1
	0x01A6	Ofp_Outcome_Sample_R	R	0.01 Hz		uint16	1
	0x01A7	Ofp_Outcome_TripValue_R	R	0.01 Hz		uint16	1
	0x01A8	Ofp_Outcome_Time_R	R	1ms		uint16	1
	0x01A9	Ofp_Outcome_Sample_S(X3)	R	0.01 Hz		uint16	1
	0x01AA	Ofp_Outcome_TripValue_S(X3)	R	0.01 Hz		uint16	1
	0x01AB	Ofp_Outcome_Time_S(X3)	R	1ms		uint16	1
	0x01AC	Ofp_Outcome_Sample_T(X3)	R	0.01 Hz		uint16	1
	0x01AD	Ofp_Outcome_TripValue_T(X3)	R	0.01 Hz		uint16	1
	0x01AE	Ofp_Outcome_Time_T(X3)	R	1ms		uint16	1
	0x01AF	Ufp_Threshold_Target	R		0.01 Hz	uint16	1

0x01 B0	Ufp_Threshold_Time	R	1ms	uint16	1
0x01 B1	Ufp_Outcome_Sample_R	R	0.01 Hz	uint16	1
0x01 B2	Ufp_Outcome_TripValue_R	R	0.01 Hz	uint16	1
0x01 B3	Ufp_Outcome_Time_R	R	1ms	uint16	1
0x01 B4	Ufp_Outcome_Sample_S(X3)	R	0.01 Hz	uint16	1
0x01 B5	Ufp_Outcome_TripValue_S(X3)	R	0.01 Hz	uint16	1
0x01 B6	Ufp_Outcome_Time_S(X3)	R	1ms	uint16	1
0x01 B7	Ufp_Outcome_Sample_T(X3)	R	0.01 Hz	uint16	1
0x01 B8	Ufp_Outcome_TripValue_T(X3)	R	0.01 Hz	uint16	1
0x01 B9	Ufp_Outcome_Time_T(X3)	R	1ms	uint16	1
0x01 BA	OfpRestric_Threshold_Target	R	0.01 Hz	uint16	1
0x01 BB	OfpRestric_Threshold_Time	R	1ms	uint16	1
0x01 BC	OfpRestric_Outcome_Sample_R	R	0.01 Hz	uint16	1
0x01 BD	OfpRestric_Outcome_TripValue_R	R	0.01 Hz	uint16	1
0x01 BE	OfpRestric_Outcome_Time_R	R	1ms	uint16	1
0x01 BF	OfpRestric_Outcome_Sample_S(X3)	R	0.01 Hz	uint16	1
0x01 C0	OfpRestric_Outcome_TripValue_S(X3)	R	0.01 Hz	uint16	1
0x01 C1	OfpRestric_Outcome_Time_S(X3)	R	1ms	uint16	1
0x01 C2	OfpRestric_Outcome_Sample_T(X3)	R	0.01 Hz	uint16	1
0x01 C3	OfpRestric_Outcome_TripValue_T(X3)	R	0.01 Hz	uint16	1

Ufp(81<.S1)test

Ofp2(81>.S2)test

0x01 C4	OfpRestrict_Outcome_Time_T(X3)	R		1ms	uint16	1	
0x01 C5	UfpRestrict_Threshold_Target	R	Ufp2(81<.S2)test	0.01 Hz	uint16	1	
0x01 C6	UfpRestrict_Threshold_Time	R		1ms	uint16	1	
0x01 C7	UfpRestrict_Outcome_Sample_R	R		0.01 Hz	uint16	1	
0x01 C8	UfpRestrict_Outcome_TripValue_R	R		0.01 Hz	uint16	1	
0x01 C9	UfpRestrict_Outcome_Time_R	R		1ms	uint16	1	
0x01 CA	UfpRestrict_Outcome_Sample_S(X3)	R		0.01 Hz	uint16	1	
0x01 CB	UfpRestrict_Outcome_TripValue_S(X3)	R		0.01 Hz	uint16	1	
0x01 CC	UfpRestrict_Outcome_Time_S(X3)	R		1ms	uint16	1	
0x01 CD	UfpRestrict_Outcome_Sample_T(X3)	R		0.01 Hz	uint16	1	
0x01 CE	UfpRestrict_Outcome_TripValue_T(X3)	R		0.01 Hz	uint16	1	
0x01 CF	UfpRestrict_Outcome_Time_T(X3)	R		1ms	uint16	1	
0x01 D0	Ovp10mAvg_Threshold_Target	R		Ovp10(59.S1)test	0.1V	uint16	1
0x01 D1	Ovp10mAvg_Threshold_Time	R			1s	uint16	1
0x01 D2	Ovp10mAvg_Outcome_Sample_R	R	0.1V		uint16	1	
0x01 D3	Ovp10mAvg_Outcome_TripValue_R	R	0.1V		uint16	1	
0x01 D4	Ovp10mAvg_Outcome_Time_R	R	1s		uint16	1	
0x01 D5	Ovp10mAvg_Outcome_Sample_S(X3)	R	0.1V		uint16	1	
0x01 D6	Ovp10mAvg_Outcome_TripValue_S(X3)	R	0.1V		uint16	1	
0x01 D7	Ovp10mAvg_Outcome_Time_S(X3)	R	1s		uint16	1	



	0x01 D8	Ovp10mAvg_Outcome_Sample_T(X3)	R	0.1V	uint16	1
	0x01 D9	Ovp10mAvg_Outcome_TripValue_T(X3)	R	0.1V	uint16	1
	0x01 DA	Ovp10mAvg_Outcome_Time_T(X3)	R	1s	uint16	1

0x04:Read Input Register(Parallel)

32bit data use little endian format

Function code	Read Input Register(Parallel State)						
	Register	Variable	W / R	Description	Unit	Data for	Length
	0x01 DD	SystemInvNum	R	SystemInvNum	1	uint16	1
	0x01 DE	Rev	R	Rev	1	uint16	1
	0x01 DF	Rev	R	Rev	1	uint16	1
	0x01 E0	InvActivePower_R_All	R	InvActivePower_R_All	1 W	int32	2
	0x01 E1						
	0x01 E2	InvActivePower_S_All	R	InvActivePower_S_All	1 W	int32	2
	0x01 E3						
	0x01 E4	InvActivePower_T_All	R	InvActivePower_T_All	1 W	int32	2
	0x01 E5						
	0x01 E6	InvReactiveOrApparentPower_R_All	R	InvReactiveOrApparentPower_R_All	1 V A	int32	2
	0x01 E7						
	0x01 E8	InvReactiveOrApparentPower_S_All	R	InvReactiveOrApparentPower_S_All	1 V A	int32	2
	0x01 E9						

0x01 EA	InvReactiveOrApparentPower_T_All	R	InvReactiveOrApparentPower_T_All	1 V A	int 32	2
0x01 EB						
0x01 EC	InvCurrent_R_All	R	InvCurrent_R_All	0. 1 A	int 32	2
0x01 ED						
0x01 EE	InvCurrent_S_All	R	InvCurrent_S_All	0. 1 A	int 32	2
0x01 EF						
0x01 F0	InvCurrent_T_All	R	InvCurrent_T_All	0. 1 A	int 32	2
0x01 F1						
0x01 F2	PvPower_ChannelA_All	R	PvPower_ChannelA_All	1 W	uin t32	2
0x01 F3						
0x01 F4	PvPower_ChannelB_All	R	PvPower_ChannelB_All	1 W	uin t32	2
0x01 F5						
0x01 F6	PvCurrent_ChannelA_All	R	PvCurrent_ChannelA_All	0. 1 A	uin t32	2
0x01 F7						
0x01 F8	PvCurrent_ChannelB_All	R	PvCurrent_ChannelB_All	0. 1 A	uin t32	2
0x01 F9						
0x01 FA	BatPower_All	R	BatPower_All	1 W	int 32	2
0x01 FB						
0x01 FC	BatCurrent_All	R	BatCurrent_All	0. 1 A	int 32	2
0x01 FD						

0x01 FE	ChargePowerLimit_All	R	ChargePowerLimit_All	1 W	int 32	2
0x01 FF						
0x02 00	DischargePowerLimit_All	R	DischargePowerLimit_All	1 W	int 32	2
0x02 01						
0x02 02	Rev	R	Rev	-	uin t16	1
0x02 03	Rev	R	Rev	-	uin t16	1
0x02 04	InvActivePower_R	R	slave1 data	1 W	int 16	1
0x02 05	InvActivePower_S	R		1 W	int 16	1
0x02 06	InvActivePower_T	R		1 W	int 16	1
0x02 07	InvReactiveOrApparentPower_R	R		1 V	int 16	1
0x02 08	InvReactiveOrApparentPower_S	R		1 V	int 16	1
0x02 09	InvReactiveOrApparentPower_T	R		1 V	int 16	1
0x02 0A	InvCurrent_R	R		0. 1	int 16	1
0x02 0B	InvCurrent_S	R		0. 1	int 16	1
0x02 0C	InvCurrent_T	R		0. 1	int 16	1
0x02 0D	PvPower_ChannelA	R		1 W	uin t16	1
0x02 0E	PvPower_ChannelB	R		1 W	uin t16	1
0x02 0F	PvVoltage_ChannelA	R		0. 1 V	uin t16	1
0x02 10	PvVoltage_ChannelB	R		0. 1 V	uin t16	1
0x02 11	PvCurrent_ChannelA	R		0. 1	uin t16	1



0x0212	PvCurrent_ChannelB	R	0.1	uint6	1
0x0213	BatPower	R	1	uint16	1
0x0214	BatVoltage	R	0.1	uint16	1
0x0215	BatCurrent	R	0.1	uint16	1
0x0216	ChargePowerLimit	R	1	uint16	1
0x0217	DischargePowerLimit	R	1	uint16	1
0x0218	BatFaultMessage	R	1	uint16	1
0x0219	BatCapacity	R	1	uint16	1
0x021A	Rev	R	1	uint32	2
0x021B					
0x021C	Rev	R	1	uint32	2
0x021D					
0x021E	InvActivePower_R	R	1	int16	1
0x021F	InvActivePower_S	R	1	int16	1
0x0220	InvActivePower_T	R	1	int16	1
0x0221	InvReactiveOrApparentPower_R	R	1	int16	1
0x0222	InvReactiveOrApparentPower_S	R	1	int16	1
0x0223	InvReactiveOrApparentPower_T	R	1	int16	1
0x0224	InvCurrent_R	R	0.1	int16	1
0x0225	InvCurrent_S	R	0.1	int16	1

0x02 26	InvCurrent_T	R	0. 1	int 16	1
0x02 27	PvPower_ChannelA	R	1 W	uin t16	1
0x02 28	PvPower_ChannelB	R	1 W	uin t16	1
0x02 29	PvVoltage_ChannelA	R	0. 1	uin t16	1
0x02 2A	PvVoltage_ChannelB	R	0. 1	uin t16	1
0x02 2B	PvCurrent_ChannelA	R	0. 1	uin t16	1
0x02 2C	PvCurrent_ChannelB	R	0. 1	uin t6	1
0x02 2D	BatPower	R	1 W	uin t16	1
0x02 2E	BatVoltage	R	0. 1	uin t16	1
0x02 2F	BatCurrent	R	0. 1	uin t16	1
0x02 30	ChargePowerLimit	R	1 W	uin t16	1
0x02 31	DischargePowerLimit	R	1 W	uin t16	1
0x02 32	BatFaultMessage	R	1	uin t16	1
0x02 33	BatCapacity	R	1 %	uin t16	1
0x02 34	Rev	R	1	uin t32	2
0x02 35					
0x02 36	Rev	R	1	uin t32	2
0x02 37					
0x02 38	InvActivePower_R	R	1 W	int 16	1
0x02 39	InvActivePower_S	R	1 W	int 16	1
0x02 3A	InvActivePower_T	R	1 W	int 16	1

slave2 data



0x023B	InvReactiveOrApparentPower_R	R
0x023C	InvReactiveOrApparentPower_S	R
0x023D	InvReactiveOrApparentPower_T	R
0x023E	InvCurrent_R	R
0x023F	InvCurrent_S	R
0x0240	InvCurrent_T	R
0x0241	PvPower_ChannelA	R
0x0242	PvPower_ChannelB	R
0x0243	PvVoltage_ChannelA	R
0x0244	PvVoltage_ChannelB	R
0x0245	PvCurrent_ChannelA	R
0x0246	PvCurrent_ChannelB	R
0x0247	BatPower	R
0x0248	BatVoltage	R
0x0249	BatCurrent	R
0x024A	ChargePowerLimit	R
0x024B	DischargePowerLimit	R
0x024C	BatFaultMessage	R
0x024D	BatCapacity	R
0x024E		

slave3 data

1	V	int 16	1
1	V	int 16	1
1	V	int 16	1
0.	1	int 16	1
0.	1	int 16	1
0.	1	int 16	1
1	W	uint16	1
1	W	uint16	1
0.	1	uint16	1
0.	1	uint16	1
0.	1	uint16	1
0.	1	uint16	1
1	W	uint16	1
0.	1	uint16	1
0.	1	uint16	1
1	W	uint16	1
1	W	uint16	1
1		uint16	1
1	%	uint16	1
1		uint	1



Address	Register Name	Access	Unit	Scale	Resolution
0x024F	Rev	R		int32	1
0x0250	Rev	R		uint32	2
0x0251					
0x0252	InvActivePower_R	R	W	int16	1
0x0253	InvActivePower_S	R	W	int16	1
0x0254	InvActivePower_T	R	W	int16	1
0x0255	InvReactiveOrApparentPower_R	R	V	int16	1
0x0256	InvReactiveOrApparentPower_S	R	V	int16	1
0x0257	InvReactiveOrApparentPower_T	R	V	int16	1
0x0258	InvCurrent_R	R	A	int16	1
0x0259	InvCurrent_S	R	A	int16	1
0x025A	InvCurrent_T	R	A	int16	1
0x025B	PvPower_ChannelA	R	W	uint16	1
0x025C	PvPower_ChannelB	R	W	uint16	1
0x025D	PvVoltage_ChannelA	R	V	uint16	1
0x025E	PvVoltage_ChannelB	R	V	uint16	1
0x025F	PvCurrent_ChannelA	R	A	uint16	1
0x0260	PvCurrent_ChannelB	R	A	uint16	1
0x0261	BatPower	R	W	uint16	1
0x0262	BatVoltage	R	V	uint16	1

slave4 data

0x04	0x02 63	BatCurrent	R	0. 1	uin t16	1
	0x02 64	ChargePowerLimit	R	1 W	uin t16	1
	0x02 65	DischargePowerLimit	R	1 W	uin t16	1
	0x02 66	BatFaultMessage	R	1	uin t16	1
	0x02 67	BatCapacity	R	1 %	uin t16	1
	0x02 68	Rev	R	1	uin t32	2
	0x02 69					
	0x02 6A	Rev	R	1	uin t32	2
	0x02 6B					
	0x02 6C	InvActivePower_R	R	1 W	int 16	1
	0x02 6D	InvActivePower_S	R	1 W	int 16	1
	0x02 6E	InvActivePower_T	R	1 W	int 16	1
	0x02 6F	InvReactiveOrApparentPower_R	R	1 V	int 16	1
	0x02 70	InvReactiveOrApparentPower_S	R	1 V	int 16	1
	0x02 71	InvReactiveOrApparentPower_T	R	1 V	int 16	1
	0x02 72	InvCurrent_R	R	0. 1	int 16	1
	0x02 73	InvCurrent_S	R	0. 1	int 16	1
	0x02 74	InvCurrent_T	R	0. 1	int 16	1
	0x02 75	PvPower_ChannelA	R	1 W	uin t16	1
	0x02 76	PvPower_ChannelB	R	1 W	uin t16	1



	0x0277	PvVoltage_ChannelA	R	slave5 data	0.1 V	uint16	1
	0x0278	PvVoltage_ChannelB	R		0.1 V	uint16	1
	0x0279	PvCurrent_ChannelA	R		0.1 A	uint16	1
	0x027A	PvCurrent_ChannelB	R		0.1 A	uint16	1
	0x027B	BatPower	R		1 W	uint16	1
	0x027C	BatVoltage	R		0.1 V	uint16	1
	0x027D	BatCurrent	R		0.1 A	uint16	1
	0x027E	ChargePowerLimit	R		1 W	uint16	1
	0x027F	DischargePowerLimit	R		1 W	uint16	1
	0x0280	BatFaultMessage	R		1	uint16	1
	0x0281	BatCapacity	R		1 %	uint16	1
	0x0282	Rev	R		1	uint32	2
	0x0283						
	0x0284	Rev	R		1	uint32	2
	0x0285						
	0x0286	InvActivePower_R	R	1 W	int16	1	
	0x0287	InvActivePower_S	R	1 W	int16	1	
	0x0288	InvActivePower_T	R	1 W	int16	1	
	0x0289	InvReactiveOrApparentPower_R	R	1 V	int16	1	
	0x028A	InvReactiveOrApparentPower_S	R	1 V	int16	1	
0x028B	InvReactiveOrApparentPower_T	R	1 V	int16	1		



0x028C	InvCurrent_R	R
0x028D	InvCurrent_S	R
0x028E	InvCurrent_T	R
0x028F	PvPower_ChannelA	R
0x0290	PvPower_ChannelB	R
0x0291	PvVoltage_ChannelA	R
0x0292	PvVoltage_ChannelB	R
0x0293	PvCurrent_ChannelA	R
0x0294	PvCurrent_ChannelB	R
0x0295	BatPower	R
0x0296	BatVoltage	R
0x0297	BatCurrent	R
0x0298	ChargePowerLimit	R
0x0299	DischargePowerLimit	R
0x029A	BatFaultMessage	R
0x029B	BatCapacity	R
0x029C	Rev	R
0x029D		
0x029E	Rev	R
0x029F		

slave6 data

0.1	int16	1
0.1	int16	1
0.1	int16	1
1W	uint16	1
1W	uint16	1
0.1V	uint16	1
0.1V	uint16	1
0.1A	uint16	1
0.1A	uint16	1
1W	uint16	1
0.1V	uint16	1
0.1A	uint16	1
1W	uint16	1
1W	uint16	1
1	uint16	1
1%	uint16	1
1	uint32	2
1	uint32	2

0x02 A0	InvActivePower_R	R	1 W	int 16	1
0x02 A1	InvActivePower_S	R	1 W	int 16	1
0x02 A2	InvActivePower_T	R	1 W	int 16	1
0x02 A3	InvReactiveOrApparentPower_R	R	1 V	int 16	1
0x02 A4	InvReactiveOrApparentPower_S	R	1 V	int 16	1
0x02 A5	InvReactiveOrApparentPower_T	R	1 V	int 16	1
0x02 A6	InvCurrent_R	R	0. 1	int 16	1
0x02 A7	InvCurrent_S	R	0. 1	int 16	1
0x02 A8	InvCurrent_T	R	0. 1	int 16	1
0x02 A9	PvPower_ChannelA	R	1 W	uint 16	1
0x02 AA	PvPower_ChannelB	R	1 W	uint 16	1
0x02 AB	PvVoltage_ChannelA	R	0. 1 V	uint 16	1
0x02 AC	PvVoltage_ChannelB	R	0. 1 V	uint 16	1
0x02 AD	PvCurrent_ChannelA	R	0. 1 A	uint 16	1
0x02 AE	PvCurrent_ChannelB	R	0. 1 A	uint 16	1
0x02 AF	BatPower	R	1 W	uint 16	1
0x02 B0	BatVoltage	R	0. 1 V	uint 16	1
0x02 B1	BatCurrent	R	0. 1 A	uint 16	1
0x02 B2	ChargePowerLimit	R	1 W	uint 16	1
0x02 B3	DischargePowerLimit	R	1 W	uint 16	1

slave7 data



0x02 B4	BatFaultMessage	R	1	uint16	1
0x02 B5	BatCapacity	R	1 %	uint16	1
0x02 B6	Rev	R	1	uint32	2
0x02 B7					
0x02 B8	Rev	R	1	uint32	2
0x02 B9					
0x02 BA	InvActivePower_R	R	1 W	int16	1
0x02 BB	InvActivePower_S	R	1 W	int16	1
0x02 BC	InvActivePower_T	R	1 W	int16	1
0x02 BD	InvReactiveOrApparentPower_R	R	1 V	int16	1
0x02 BE	InvReactiveOrApparentPower_S	R	1 V	int16	1
0x02 BF	InvReactiveOrApparentPower_T	R	1 V	int16	1
0x02 C0	InvCurrent_R	R	0.1 A	int16	1
0x02 C1	InvCurrent_S	R	0.1 A	int16	1
0x02 C2	InvCurrent_T	R	0.1 A	int16	1
0x02 C3	PvPower_ChannelA	R	1 W	uint16	1
0x02 C4	PvPower_ChannelB	R	1 W	uint16	1
0x02 C5	PvVoltage_ChannelA	R	0.1 V	uint16	1
0x02 C6	PvVoltage_ChannelB	R	0.1 V	uint16	1
0x02 C7	PvCurrent_ChannelA	R	0.1 A	uint16	1

slave8 data

0x02 C8	PvCurrent_ChannelB	R	0.1	uint16	1
0x02 C9	BatPower	R	1	uint16	1
0x02 CA	BatVoltage	R	0.1	uint16	1
0x02 CB	BatCurrent	R	0.1	uint16	1
0x02 CC	ChargePowerLimit	R	1	uint16	1
0x02 CD	DischargePowerLimit	R	1	uint16	1
0x02 CE	BatFaultMessage	R	1	uint16	1
0x02 CF	BatCapacity	R	1	uint16	1
0x02 D0	Rev	R	1	uint32	2
0x02 D1					
0x02 D2	Rev	R	1	uint32	2
0x02 D3					
0x02 D4					
0x02 D5	InvActivePower_R	R	1	int16	1
0x02 D6	InvActivePower_S	R	1	int16	1
0x02 D7	InvActivePower_T	R	1	int16	1
0x02 D8	InvReactiveOrApparentPower_R	R	1	int16	1
0x02 D9	InvReactiveOrApparentPower_S	R	1	int16	1
0x02 DA	InvReactiveOrApparentPower_T	R	1	int16	1
0x02 DB	InvCurrent_R	R	0.1	int16	1
0x02 DB	InvCurrent_S	R	0.1	int16	1

0x02 DC	InvCurrent_T	R	0.1	int16	1
0x02 DD	PvPower_ChannelA	R	1	uint16	1
0x02 DE	PvPower_ChannelB	R	1	uint16	1
0x02 DF	PvVoltage_ChannelA	R	0.1	uint16	1
0x02 E0	PvVoltage_ChannelB	R	0.1	uint16	1
0x02 E1	PvCurrent_ChannelA	R	0.1	uint16	1
0x02 E2	PvCurrent_ChannelB	R	0.1	uint16	1
0x02 E3	BatPower	R	1	uint16	1
0x02 E4	BatVoltage	R	0.1	uint16	1
0x02 E5	BatCurrent	R	0.1	uint16	1
0x02 E6	ChargePowerLimit	R	1	uint16	1
0x02 E7	DischargePowerLimit	R	1	uint16	1
0x02 E8	BatFaultMessage	R	1	uint16	1
0x02 E9	BatCapacity	R	1	uint16	1
0x02 EA	Rev	R	1	uint32	2
0x02 EB					
0x02 EC	Rev	R	1	uint32	2
0x02 ED					

slave9 data



0x04:Read Input Register(Data Hub)

Function code	Read Input Register(Data Hub)							
	register	variable	W/R	decription	unit	data forma	lenth	
0x04	0x06DF	total_length	R		1	uint1	1	
	0x06E0	PallerLen	R		1	uint1	1	
	0x06E1	bDHWakeUpSlaver	R		1	uint1	1	
	0x06E2	bDHMasterBmsSwitc hState	R		1	uint1	1	
	0x06E3	bDHMasterBmsCom State	R		1	uint1	1	
	0x06E4	bDHMasterBypassCo nfig	R		1	uint1	1	
	0x06E5	bDHMasterBypassW orkState	R		1	uint1	1	
	0x06E6	bdHExternalGen	R		1	uint1	1	
	0x06E7	bDHMasterRunMode	R		1	uint1	1	
	0x06E8	bDHMasterCom485S tate	R	Only X1	1	uint1	1	
	0x06E9	bDHBatteryChargeM onState	R	Only X1				
	0x06EA~0x 06EF	Rev[22]	R		1	uint1	1	
	0x0700	ChargeLen	R	Ev Charge	1	uint1	1	
	0x0701	RefPowerToEV	R		1	uint1	1	
	0x0702	PowerToEV	R		1	uint3 2	2	
	0x0703		R		1			
	0x0704	PvRef	R		1	uint1	1	
	0x0705	FeedinPower_Rphase (X3)/ FeedinPower(X1)	R		1	uint3 2	2	
	0x0706		R		1			
	0x0707	FeedinPower_Sphase (X3)	R		1	uint3 2	2	
	0x0708		R		1			
	0x0709	FeedinPower_Tphase (X3)	R		1	uint3 2	2	
	0x070A		R		1			
	0x070B~0x 070F	Rev	R			1	\	\
	0xEF00	bGetChargePower	R		CurrentCharging Power Only X2	1	uint1 6	1
	0xEF01~0x 0FFF	Rev			1	uint1	1	
	0xF000-0xF 01D	Error	R	Error/Warning data	1	Uint1 6	30	
	0xF01E	RealTime Length	R	number of Set item	1	Uint1 6	1	
	0xF01F-	RealTime Data	R	RealTime Data	1	Uint1 6	N	

Note: Only for internal device communication



0x06:Write Single Register

Write Single Register								
Function Code	Register	Variable	W/R	Decription	Unit	Data format	length	E E Save
		0x0000	UnlockPassword	W	UnlockPassword	1	uint16	1
	0x0001	Reconnection Time	W	(15~600)	1s	uint16	1	★
	0x0002	CheckingTime	W	0~1500(X1) 0~1000(X3)	1s	uint16	1	★
	0x0003	Adjust_Battery_U	W	(0~3900)	0.1 V	uint16	1	★
	0x0004	Adjust_Battery_I	W	Postive mean charge; negative mean discharge. (-350~350)	0.1 A	int16	1	★
	0x0005	Vac_Min	W	Vac_Min (230~3000)(X1) (250~2300)(X3)	0.1 V	uint16	1	★
	0x0006	Vac_Max	W	Vac_Max (1000~3000)(X1) (1270~3000)(X3)	0.1 V	uint16	1	★
	0x0007	Fac_Min	W	Fac_Min (4000~6500)	0.0 1Hz	uint16	1	★
	0x0008	Fac_Max	W	Fac_Max (4500~7000)(X1) (4000~7000)(X3)	0.0 1Hz	uint16	1	★

	0x00 09	SafetyCode	W	<p>Safety type</p> <p>0: VDE0126</p> <p>1: VDE4105</p> <p>2: AS 4777_2020_A</p> <p>3: G98/1 (X1/X3)</p> <p>4: C10/11</p> <p>5: TOR(X1/X3)</p> <p>6: EN50438_NL</p> <p>7: [REDACTED]</p> <p>Denmark2019_W(X3)</p> <p>8: CEB</p> <p>9: CEI021</p> <p>10:NRS097_2_1</p> <p>11:VDE0126_Gr_Is</p> <p>12:UTE_C15_712</p> <p>13:IEC61727(X1/X3)</p> <p>14:G99/1</p> <p>15:VDE0126_Gr_Co</p> <p>16: Guyana</p> <p>17:C15_712_is_50</p> <p>18:C15_712_is_60</p> <p>19:New Zealand</p> <p>20:RD1699</p> <p>21:Chile</p> <p>------(X3)-----</p> <p>22:Israel</p> <p>23:Czech_PPDS_2020</p> <p>24:RD1699_Island</p> <p>25:EN50549_Poland</p> <p>26:EN50438_Portugal</p> <p>27:PEA</p> <p>28:MEA</p> <p>29:EN50549_Sweden</p> <p>30:Philippines</p> <p>31:EN50438_Slovenia</p> <p>32:Denmark2019_E</p> <p>33:EN50549_EU</p> <p>34:AS 4777_2020_B</p> <p>35:AS 4777_2020_C</p> <p>36:User-Defined</p> <p>37:EN50549_Romania</p> <p>38:CEI016</p> <p>39: ACEA</p> <p>40: Chile2021 MT_R</p> <p>41: Chile2021 MT_U</p> <p>42: Czech_2021_2</p> <p>43: G98/NI-1</p> <p>44: G99/NI-1</p> <p>45: G99/NI_Type B</p> <p>46: CQC</p> <p>47: LA_3P_380</p> <p>48: LA_3P_220</p> <p>------(X3)-----</p> <p>------(X1)-----</p> <p>22:EN50438_Ireland</p> <p>23:Philippines</p> <p>24:Czech_PPDS_2020</p> <p>25:Czech_50438</p> <p>26: EN50549_EU</p>	—	uint1 6	1	★ R
--	------------	------------	---	--	---	------------	---	--------

0x00 0A	MateBoxEnable	W	0: Disable 1:Enable	1	uint16	1	★
0x00 0B	Grid_10Min_high	W	Grid_10Min_high (1500~3000)	0.1 V	uint16	1	★
0x00 0C	Vac_Min_slow_protect	W	Vac_Min_slow_protect (1500~3000) (X1) (250~2300) (X3)	0.1 V	uint16	1	★
0x00 0D	Vac_Max_slow_protect	W	Vac_Max_slow_protect (1000~3120)(X1) (1270~3000)(X3)	0.1 V	uint16	1	★
0x00 0E	Fac_Min_slow_Protect	W	Fac_Min_slow_Protect (4000~6500)	0.0 1Hz	uint16	1	★
0x00 0F	Fac_Max_slow_Protect	W	Fac_Max_slow_Protect (4500~7000)(X1) (4000~7000)(X3)	0.0 1Hz	uint16	1	★
0x00 10	DCI_Limit	W	DCI_Limit (20~1000)	1m A	uint16	1	★
0x00 11	active_Power_Limit	W	active_Power_Limit (0~100)	0-1 00	uint16	1	★
0x00 12	Adjust_Pv1_Current	W	Adjust_Pv1_Current (10~3000)	0.0 1A	uint16	1	★
0x00 13	Adjust_Pv2_Current	W	Adjust_Pv2_Current (10~3000)	0.0 1A	uint16	1	★
0x00 14	Adjust_Pv1_Volt	W	Adjust_Pv1_Volt (100~10000)	0.1 V	uint16	1	★
0x00 15	Adjust_Pv2_Volt	W	Adjust_Pv2_Volt (100~10000)	0.1 V	uint16	1	★
0x00 16	Adjust_AC_Current_R	W	Adjust_AC_Current_R (10~300)	0.1 A	uint16	1	★
0x00 17	Adjust_AC_Volt_R	W	Adjust_AC_Volt_R (1500~3000)(X1) (500~3000)(X3)	0.1 V	uint16	1	★
0x00 18 ~0x0 01A	REV	W	REV	—	uint16	1	
0x00 1B	MatchResistanceSet	W	0:disable 1:enable	—	uint16	1	★
0x00 1C	SystemON_OFF	W	0:OFF 1:ON	1	uint16	1	★
0x00 1D	FactoryReset	W	1 effect	1	uint16	1	
0x00 1E	Inverter_Clear_History	W	1 effect	1	uint16	1	

0x00 1F 31	CSolarhargerUseMode	W	0:Self use mode 1:Feed-in priority 2:Back up mode 3:Manual mode 4:Peak Shaving 5:TOU Mode	—	uint16	1	★
0x00 20	Manual mode	w	0:Stop force charge&discharge 1:Force charge 2:Force discharge	1	uint16	1	
0x00 21	wBattery1_Type	W	0: Lead Acid 1: Lithium	1%	uint16	1	★
0x00 22	Charge_floatVolt	W	Lead-acid battery charge float voltage (X1:850~4000 X3:1600~8000)	0.1 V	uint16	1	★
0x00 23	Discharge_CutVolt	W	Lead-acid battery discharge cut-off voltage (X1:850~4000 X3:1600~8000)	0.1 V	uint16	1	★
0x00 24	Battery1_ChargeMaxCurrent	W	Lead-acid battery Charge MaxCurrent (0~300)	0.1 A	uint16	1	★
0x00 25	Battery1_DischargeMaxCurrent	W	Lead-acid battery discharge MaxCurrent (0~300)	0.1 A	uint16	1	★
0x00 26	wBatteryDischargeBackupVoltage	W	wBatteryDischargeBackupVoltage (X1:850~4000 X3:1600~8000)	0.1 V	uint16	1	★
0x00 27	CtType (X3)	R	0:100A 1:200A	—	uint16	1	★
0x00 28	EpsDcvAdjEn(X3)		0: Disable 1: Enable	-	uint16	1	
0x00 29	CalibGainInvVoltR(X3)	W	CalibGainInvVoltR(X3) (500~3000)(X3)	0.1 V	uint16	1	★
0x00 2A	CalibGainInvVoltS(X3)	W	CalibGainInvVoltS(X3) (500~3000)(X3)	0.1 V	uint16	1	★
0x00 2B	CalibGainInvVoltT(X3)	W	CalibGainInvVoltT(X3) (500~3000)(X3)	0.1 V	uint16	1	★
0x00 2C	CalibEPSDcvAdjR(X3)	W	CalibEPSDcvAdjR(X3) (500~3000)(X3)	0.0 1V	int16	1	★
0x00 2D	CalibEPSDcvAdjS(X3)	W	CalibEPSDcvAdjS(X3) (500~3000)(X3)	0.0 1V	int16	1	★

0x00 2E	CalibEPSCvAdjT(X3)	W	CalibEPSCvAdjT(X3) (500~3000)(X3)	0.0 1V	int16	1	★
0x00 2F	ClearEnergy_Meter/CT_1	W	1 effect	1	uint16	1	
0x00 30	Adjust_AC_Current_S(X3)	W	Adjust_AC_Current_S (10~300)	0.1 A	uint16	1	★
0x00 31	Adjust_AC_Volt_S(X3)	W	Adjust_AC_Volt_S (1500~3000)(X1) (500~3000)(X3)	0.1 V	uint16	1	★
0x00 32	Adjust_AC_Current_T(X3)	W	Adjust_AC_Current_T (10~300)	0.1 A	uint16	1	★
0x00 33	Adjust_AC_Volt_T(X3)	W	Adjust_AC_Volt_T (1500~3000)(X1) (500~3000)(X3)	0.1 V	uint16	1	★
0x00 34	Adjust_CT_Zero(X3)	W	1 effect	1	uint16	1	
0x00 35	Adjust_CT_Power_R(X3)	W	0~65535	1W	uint16	1	★
0x00 36	Adjust_CT_Power_S(X3)	W	0~65535	1W	uint16	1	★
0x00 37	Adjust_CT_Power_T(X3)	W	0~65535	1W	uint16	1	★
0x00 38	EpsPhaseSeqDetect	W	0:disable 1:enable	1	uint16	1	
0x00 39	UserPassword	W	UserPassword 0000~9999	-	uint16	1	★
0x00 3A	AdvancedPassword	W	AdvancedPassword 0000~9999	-	uint16	1	★
0x00 41	Export control Factory_Limit	W	Export control User_Limit (0~60000)(X1) (0~30000)(X3)	1W(X1) 10 W(X3)	uint16	1	★
0x00 42	Export control User_Limit	W	Export control User_Limit (0~60000)(X1) (0~30000)(X3)	1W(X1) 10 W(X3)	uint16	1	★
0x00 43	Off-grid_Mute	W	0: disable 1:enable	1	uint16	1	★
0x00 44	Off-grid_MinSoC	W	10~25	1%	uint16	1	★
0x00 45	Off-grid Frequency	W	0: 50Hz 1:60HZ	1	uint16	1	
0x00 46	AgeingMode	W	1:Enable 0:Disable	1	uint16	1	

0x0047	Language	W	Language: 0:English 1:German 2:French 3:Polish 4:Spanish 5: Portuguese 6:Italian 7:中文 8:Ukrainian	1	uint16	1	★
0x0048	EnableMPPT	W	1:Enable 0:Disable	1	uint16	1	
0x0049	wTuvp_L2	W	TripTime_UnderVoltage_Level2 (0~10000)	1ms (X1) 10ms (X3)	uint16	1	★
0x004A	wTovp_L2	W	TripTime_OverVoltage_Level2 (0~10000)	1ms (X1) 10ms (X3)	uint16	1	★
0x004B	wTufp_L2	W	TripTime_UnderFrequency_Level2 (0~10000)	1ms (X1) 10ms (X3)	uint16	1	★
0x004C	wTofp_L2	W	TripTime_OverFrequency_Level2 (0~10000)	1ms (X1) 10ms (X3)	uint16	1	★
0x004D	wTuvp_L1	W	TripTime_UnderVoltage_Level1 0~50000(X1) 0~10000(X3)	1ms (X1) 10ms (X3)	uint16	1	★
0x004E	wTovp_L1	W	TripTime_OverVoltage_Level1 0~60000(X1) 0~10000(X3)	1ms (X1) 10ms (X3)	uint16	1	★
0x004F	wTufp_L1	W	TripTime_UnderFrequency_Level1 (0~10000)	1ms (X1) 10ms (X3)	uint16	1	★
0x0050	wTofp_L1	W	TripTime_OverFrequency_Level1 (0~10000)	1ms (X1) 10ms (X3)	uint16	1	★
0x0051	PVConnectipon	W	0: MULTI 1: COMM	1	uint16	1	★

0x0052	ShutDown	W	0:Disable 1:Enable	1	uint16	1	★
0x0053	MicroGrid	W	0:Disable 1:Enable	1	uint16	1	★
0x0054	Self Test start	W	0: stop 1:test Ovp(59.S2) 2:test Uvp(27.S1) 3:test Uvp(27.S2) 4: test Ofp(81>.S1) 5: test Ufp(81<.S1) 6: test Ofp2(81>.S2) 7:test Ufp2(81<.S2) 8: test Ovp_10(59.S1) 10:test all	1	uint16	1	
0x0055	Clear overload fault	W	Write 1 effcet	1	uint16	1	
0x0056	Bat_Awaken	W	Write 1 effcet (Lead-acid battery)	1	uint16	1	
0x0057	OFPL_CurveType	W	0:Symmetry curve 1:Asymmetry curve	1	uint16	1	★
0x0058	OFPL_Tstop	W	0~600	1s	uint16	1	★
0x0059	OFPL_RemovePoint	W	4955~5200(X1) 5000~6200(X3)	0.0 1Hz	uint16	1	★
0x005A	OFPL_StartPoint	W	Over Frequency drop load output start point 5010~5200(X1) 5000~6200(X3)	0.0 1Hz	uint16	1	★
0x005B	OFPL_SetRate	W	drop output slope (2~12)	1%	uint16	1	★
0x005C	OFPL_DelayTime	W	FreDroopDelayTime (0~2000)(X1) (0~1000)(X3)	1ms	uint16	1	★
0x005D	OFPL_fstop_disch	W	5050~5200(X1) 5050~6200(X3)	0.0 1Hz	uint16	1	★
0x005E	OFPL_fPmin	W	5100~5300(X1) 5100~6300(X3)	0.0 1Hz	uint16	1	★
0x005F	Reset_Mgr_EE	W	1:Reset normal configuration.	1	uint16	1	
0x0060	absorpt_voltage	W	Lead acide battery absorpt_voltage (X1:850~4000 X3:1600~8000)	0.1 V	uint16	1	★
0x0061	SelfUse_Discharge_MinSoC	W	10%~100%	1%	uint16	1	★
0x0062	SelfUse_NightCharge_Enabl e	W	0: Disable 1: Enable	1	uint16	1	★

0x0063	SelfUse_NightCharge_UpperSoC	W	This value will be enabled if SelfUse_NightCharge_Enable is 1. 10%~100%	1%	uint16	1	★
0x0064	Feedin_NightCharge_UpperSoC	W	10%~100%	1%	uint16	1	★
0x0065	Feedin_Discharge_MinSoC	W	10%~100%	1%	uint16	1	★
0x0066	BackUp_NightCharge_UpperSoC	W	30%~100%	1%	uint16	1	★
0x0067	BackUp_Discharge_MinSoC	W	15%~100%	1%	uint16	1	★
0x0068	NightCharge_Period1_StartTime	W	StartHour	0~23	uint8(Hi)	1	★
		W	StartMinute	0~59	uint8(Lo)		
0x0069	NightCharge_Period1_EndTime	W	EndHour	0~23	uint8(Hi)	1	★
		W	EndMinute	0~59	uint8(Lo)		
0x006A	Discharge_Period1_StartTime	W	StartHour	0~23	uint8(Hi)	1	★
		W	StartMinute	0~59	uint8(Lo)		
0x006B	Discharge_Period1_EndTime	W	EndHour	0~23	uint8(Hi)	1	★
		W	EndMinute	0~59	uint8(Lo)		
0x006C	Set_Chrg&DischrgPeriod2_Enable	W	1:Enable 0:Disable	1	uint16	1	★
0x006D	NightCharge_Period2_StartTime	W	StartHour	0~23	uint8(Hi)	1	★
		W	StartMinute	0~59	uint8(Lo)		
0x006E	NightCharge_Period2_EndTime	W	EndHour	0~23	uint8(Hi)	1	★
		W	EndMinute	0~59	uint8(Lo)		
0x006F	Discharge_Period2_StartTime	W	StartHour	0~23	uint8(Hi)	1	★
		W	StartMinute	0~59	uint8(Lo)		

0X06	0x0070	Discharge_Period2_EndTime	W	EndHour	0~23	uint8(Hi)	1	★
			W	EndMinute	0~59	uint8(Lo)		
	0x0071	MainBreakerCurrentLimit	W	10~100(X1) 10~250(X3)	1A	uint16	1	★
	0x0072	PowerfactorMode	W	0: Off 1:Over Excited 2:Under Excited 3:Curve 4:Qu 5:Fix Q Power	1	uint16	1	★
	0x0073	PowerfactorData	W	80~100	0.01	uint16	1	★
	0x0074	PowerFactor_Curve_PF1	W	80~100	0.01	uint16	1	★
	0x0075	PowerFactor_Curve_PF2	W	80~100	0.01	uint16	1	★
	0x0076	PowerFactor_Curve_PF3	W	80~100	0.01	uint16	1	★
	0x0077	PowerFactor_Curve_PF4	W	80~100	0.01	uint16	1	★
	0x0078	PowerFactor_Curve_Power1	W	0~100	1%	uint16	1	★
	0x0079	PowerFactor_Curve_Power2	W	0~100	1%	uint16	1	★
	0x007A	PowerFactor_Curve_Power3	W	0~100	1%	uint16	1	★
	0x007B	PowerFactor_Curve_Power4	W	0~100	1%	uint16	1	★
	0x007C	PowerFactor_Curve_PfLockInPoint	W	105~110	0.01	uint16	1	★
	0x007D	PowerFactor_Curve_PfLockOutPoint	W	90~98	0.01	uint16	1	★
	0x007E	PowerFactor_Curve_3Tau	W	6~180	1s	uint16	1	★
	0x007F	PowerFactor_Qu_VoltRatio1	W	0~60	1%	uint16	1	★
	0x0080	PowerFactor_Qu_VoltRatio4	W	-60~-30(X1) -60~0(X3)	1%	Int16	1	★
	0x0081	PowerFactor_Qu_QuResponseV1	W	1800~2530(X1) 250~2300(X3)	0.1V	uint16	1	★
	0x0082	PowerFactor_Qu_QuResponseV2	W	1800~2530(X1) 250~2300(X3)	0.1V	uint16	1	★

0x0083	PowerFactor_Qu_QuResponseV3	W	2070~2650(X1) 1270~3000(X3)	0.1 V	uint16	1	★
0x0084	PowerFactor_Qu_QuResponseV4	W	2070~2650(X1) 1270~3000(X3)	0.1 V	uint16	1	★
0x0085	PowerFactor_Qu_K	W	-100~100	1%	Int16	1	★
0x0086	PowerFactor_Qu_3Tau	W	6~180	1s	uint16	1	★
0x0087	PowerFactor_Qu_QuDelayTimer	W	0~30(X1) 0~200(X3)	1s	uint16	1	★
0x0088	PowerFactor_Qu_QuLockEn	W	{0,1}	1	uint16	1	★
0x0089	PowerFactor_Qu_QuLockIn	W	0~20	1%	uint16	1	★
0x008A	PowerFactor_Qu_QuLockOut	W	0~20	1%	uint16	1	★
0x008B	PowerFactor_FixQPower	W	PowerFactor_FixQPower_Min ~PowerFactor_FixQPower_Max	1Var(X1) 10V ar(X3)	int16	1	★
0x008C	InvVoltZeroAdj(X3)	W	1:准备校准 2: 开始校准 3: 校准结果检查	1	uint16	1	
0x008D	PgridBias	W	0:Disable 1:Grid 2:INV	-	uint16	1	★
0x008E	EpsRestartSoc	W	EpsRestartSoc	1%	uint16	1	★
0x008F	485CommFunSelect	W	0:modbus 485 1:EV Charge 2:DadaHub 3:AdaptBoxG2 4: EVC& AdaptBoxG2 5: AdaptBoxG2 & Meter 6:EVC&AdaptBoxG2& Meter	1	uint16	1	★
0x0090	ConnectSlop(X3)	W	1~10000	1%	uint16	1	★
0x0091	ReconnectSlop(X3)	W	1~10000	1%	uint16	1	★
0x0092	UFPL_StartPoint	W	Under Frequency Safe load output start point 4600~4990 (X1) 4600~6000 (X3)	0.0 1Hz	uint16	1	★
0x0093	UFPL_SetRate	W	Under Frequency drop output slope (2~12)	1%	uint16	1	★

0x0094	UFPL_DelayTime	W	FreDroopDelayTime (0~1000)	1ms	uint16	1	★
0x0095	UFPL_RemovePoint	W	4600~5045(X1) 4600~5000(X3)	0.0 1Hz	uint16	1	★
0x0096	UFPL_fstop_ch	W	4800~4950(X1) 4800~5950(X3)	0.0 1Hz	uint16	1	★
0x0097	UFPL_fPmax	W	4700~4900(X1) 4700~5900(X3)	0.0 1Hz	uint16	1	★
0x0098	ShadowFixFuncEnable2	R	-0:Off, 1:Low, 2:Middle, 3:Hight	-	uint16	1	★
0x0099	HotStandbyEN	W	0:enable 1:disable	1	uint16	1	★
0x009A	ExtendBmsSetting	W	0:disable 1:enable	1	uint16	1	★
0x009B	ATE Test	W	1effect	1	uint16	1	
0x009C	wShadowFixFuncEnable	W	0:Off 1:Low 2:Middle 3:Hight	1	uint16	1	★
0x009D	ExternalSignal	W	ExternalSignal	1	uint16	1	★
0x009E	PhasePowerBalance(X3)	W	0:disable 1:enable	1	uint16	1	★
0x009F	OFPL_Wgra	W	500~10000	0.00 01	uint16	1	★
0x00A0	MeterFunction	W	0:disable 1:enable	1	uint16	1	★
0x00A1	Meter1_ID	W	Meter1 ID 1~200	1	uint16	1	★
0x00A2	Meter2_ID	W	Meter2 ID 1~200	1	uint16	1	★
0x00A3	Reset Meter2 Energy	W	1effect	1	uint16	1	
0x00A4	DirectionMeterCT1	W	0:Positive 1:Negative	1	uint16	1	★
0x00A5	DirectionMeter2	W	0:Positive 1:Negative	1	uint16	1	★
0x00A6	DischCutOffPoint_DifferentEN	W	Lead acide battery 0:disable 1:enable	1	uint16	1	★
0x00A7	ExternalInv	W	0:Enable1:Disable	1	uint16	1	★
0x00A8	DischCutOffVoltage_GridMode	W	Lead acide battery DischargeCutVoltage~ 8000	0.1 V	uint16	1	★

0x00 A9	DRMFunctionEnable	R	0:disable 1:enable	1	uint16	1	★
0x00 AA	Meter/CT_Select	W	0:Meter 1:CT	1	uint16	1	★
0x00 AB	FVRT_Function	W	0:Disable 1:Enable	1	uint16	1	★
0x00 AC	FVRT_VacUpper	W	230~288(X1) 230~276(X3)	1V	uint16	1	★
0x00 AD	FVRT_VacLower	W	46~240(X1) 30~230(X3)	1V	uint16	1	★
0x00 AE	PuFuncEnable	W	0:disable 1:enable	1	uint16	1	★
0x00 AF	PuFunc_ResponseV1	W	(207.0~276.0)(X1) (250~2300)(X3)	0.1 V	uint16	1	★
0x00 B0	PuFunc_ResponseV2	W	(207.0~276.0)(X1) (250~2300)(X3)	0.1 V	uint16	1	★
0x00 B1	PuFunc_ResponseV3	W	(207.0~276.0)(X1) (1270~3000)(X3)	0.1 V	uint16	1	★
0x00 B2	PuFunc_ResponseV4	W	(207.0~276.0)(X1) (1270~3000)(X3)	0.1 V	uint16	1	★
0x00 B3	PuFunc_3Tau	W	6~180(X1) 3~180(X3)	1s	uint16	1	★
0x00 B4	LeaseModeEnable	W	0:Disable 1:Enable	1	uint16	1	★
0x00 B5	DeviceLockFlag	W	0:UnLock 1:Lock	1	uint16	1	★
0x00 B6	ManualModeControl	W	0:OFF 1:ON	1	uint16	1	★
0x00 B7	FeedinOnPower	W	0~8000	1W	uint16	1	★
0x00 B8	SwitchOnSoc	W	0~100	1%	uint16	1	★
0x00 B9	ConsumeOffPower	W	0~8000	1W	uint16	1	★
0x00 BA	SwitchOffSoc	W	0~100	1%	uint16	1	★
0x00 BB	MinimumPerOnSignal	W	5~100	1Min	uint16	1	★
0x00 BC	MiaimumPerDayOn	W	5~1200	1Min	uint16	1	★
0x00 BD	ScheduleEnable	W	0: disable 1:enable	1	uint16	1	★

0x00 BE	WorkStartTime1	W	bP1_StartHour	0~2 3	uint8(Hi)	1	★
		W	bP1_StartMinute	0~5 9	uint8(Lo)		
0x00 BF	WorkEndTime1	W	bP1_StopHour	0~2 3	uint8(Hi)	1	★
		W	bP1_StopMinute	0~5 9	uint8(Lo)		
0x00 C0	WorkStartTime2	W	bP2_StartHour	0~2 3	uint8(Hi)	1	★
		W	bP2_StartMinute	0~5 9	uint8(Lo)		
0x00 C1	WorkEndTime2	W	bP2_StopHour	0~2 3	uint8(Hi)	1	★
		W	bP2_StopMinute	0~5 9	uint8(Lo)		
0x00 C2	LoadManagementWorkMode	W	0:Disable 1:manual 2:SmartSave	1	uint1 6	1	★
0x00 C3	DryContactMode	W	0:Load Management 1:Generator Control	1	uint1 6	1	★
0x00 C4	SelfuseModeBackupEn	W	0:disable 1:enable	1	uint1 6	1	★
0x00 C5	SelfUse_BackupSoc	W	10~100	1%	uint1 6	1	★
0x00 C6	Parallel Setting	W	0:Free 1: Master	1	uint1 6	1	★
0x00 C7	ExternalGenEn	W	0:Disable 1:ATS Control 2:Dry Contact	1	uint1 6	1	★
0x00 C8	ExternalGenMaxCharge	W	ExternalGenMaxCharge	1W(X1) 10 W(X3)	uint1 6	1	★
0x00 C9	ModBusRTU_Address	W	ModBusRTU_Address	1	uint1 6	1	★
0x00 CA	ModBusRTU_BraudRate	W	0:115200 1:57600 2:56000 3:38400 4:19200 5:14400 6:9600	bit/s	uint1 6	1	★
0x00 CB	SetPuPower1	W	0~20	1%	uint1 6	1	★
0x00 CC	SetPuPower2	W	0~100	1%	uint1 6	1	★
0x00 CD	SetPuPower3	W	0~100	1%	uint1 6	1	★

0x00 CE	SetPuPower4	W	0~20	1%	uint16	1	★
0x00 CF	BatteryHeatingEn	W	BatteryHeatingEn	—	uint16	1	★
0x0D 0	HeatingPeriod1_StartHour	W	HeatingPeriod1_StartHour	0~23	uint8(Hi)	1	★
	HeatingPeriod1_StartMinute	W	HeatingPeriod1_StartMinute	0~59	uint8(Lo)		
0x00 D1	HeatingPeriod1_EndHour	W	HeatingPeriod1_EndHour	0~23	uint8(Hi)	1	★
	HeatingPeriod1_EndMinute	W	HeatingPeriod1_EndMinute	0~59	uint8(Lo)		
0x00 D2	HeatingPeriod2_StartHour	W	HeatingPeriod2_StartHour	0~23	uint8(Hi)	1	★
	HeatingPeriod2_StartMinute	W	HeatingPeriod2_StartMinute	0~59	uint8(Lo)		
0x00 D3	HeatingPeriod2_EndHour	W	HeatingPeriod2_EndHour	0~23	uint8(Hi)	1	★
	HeatingPeriod2_EndMinute	W	HeatingPeriod2_EndMinute	0~59	uint8(Lo)		
0x00 D4	ExportSoftLimitEn	W	0:Disable 1:Enable	-	uint16	1	★
0x00 D5	ExportHardLimitEn	W	0:Disable 1:Enable	-	uint16	1	★
0x00 D6	HardExportPower	W	0~15000	1W(X1) 10W(X3)	uint16	1	★
0x00 D7	GeneralSoftLimitEn	W	0:Disable 1:Enable	-	uint16	1	★
0x00 D8	GeneralHardLimitEn	W	0:Disable 1:Enable	-	uint16	1	★
0x00 D9	SoftAcPowerLimit	W	0~15000	1VA(X1) 10VA(X3)	uint16	1	★
0x00 DA	HardAcPowerLimit	W	0~15000	1VA(X1) 10VA(X3)	uint16	1	★

0x00 DB	ResetErrorLog	W	Write 1 effect	-	uint16	1	
0x00 DC	ResetINVEnergy	W	Write 1 effect	-	uint16	1	
0x00 DD 0x00 DE	reserve	W		-	uint16	3	
0x00 DF	ResetINV	W	Write 1 effect	-	uint16	1	
0x00 E0	BatteryChargeMaxSoc	W	10~100	1%	uint16	1	★
0x00 E1	mBatterToEVCharge	W	0:Disable 1:Enable	1	uint16	1	★
0x00 E2	BMS_Restart	W	1:effect	1	uint16	1	
0x00 E3	Start Gen Method	W	0:reference soc 1:immediately	1	uint16	1	★
0x00 E4	Switch on SoC	W	Switch on SoC(reference soc)	1%	uint16	1	★
0x00 E5	Switch off SoC	W	Switch off SoC(reference soc)	1%	uint16	1	★
0x00 E6	MaxRunTime	W	MaxRunTime(1~60000)	1Min	uint16	1	★
0x00 E7	MinRestTime	W	MinRestTime(1~60000)	1Min	uint16	1	★
0x00 E8	Allow Work start time Hour	W	Allow Work start time Hour	0~23	uint8(Hi)	1	★
	Allow Work start time Minute	W	Allow Work start time Minute	0~59	uint8(Lo)		
0x00 E9	Allow Work stop time Hour	W	Allow Work start time Hour	0~23	uint8(Hi)	1	★
	Allow Work stop time Minute	W	Allow Work start time Minute	0~59	uint8(Lo)		
0x00 EA	PeakShavingDischarPeriod.b P1_StartHour	W	0-23	1	uint8(Hi)	1	★
	PeakShavingDischarPeriod.b P1_StartMinute	W	0-59	1	uint8(Lo)	1	★
0x00 EB	PeakShavingDischarPeriod.b P1_StopHour	W	0-23	1	uint8(Hi)	1	★
	PeakShavingDischarPeriod.b P1_StopMinute	W	0-59	1	uint8(Lo)	1	★
0x00	PeakShavingDischarPeriod.b P2_StartHour	W	0-23	1	uint8(Hi)	1	★

EC	PeakShavingDischarPeriod.b P2_StartMinute	W	0-59	1	uint8(Lo)	1	★
0x00 ED	PeakShavingDischarPeriod.b P2_StopHour	W	0-23	1	uint8(Hi)	1	★
0x00 EE	PeakShaving.PeriodBPeakLi mits1	W	0~60000(X1) 0~3000(X3)	1W(X1) 10 W(X3)	uint1 6	1	★
0x00 EF	PeakShaving. PeriodDPeakLimits2	W	0~60000(X1) 0~3000(X3)	1W(X1) 10 W(X3)	uint1 6	1	★
0x00 F0	PeakShaving. PeriodAChargeFromGridEn	W	0:Disable 1:Enable	1	uint1 6	1	★
0x00 F1	PeakShaving .PeriodACharg ePowerLimits	W	0~7500(X1) 0~15000(X3)	1W	uint1 6	1	★
0x00 F2	PeakShaving .PeriodAMax_ SOC	W	10~100	1%	uint1 6	1	★
0x00 F3	PeakShaving.PeriodCReserv ed_SOC	W	10~100	1%	uint1 6	1	★
0x00 F4	VPPExitIdleEn	W	0:Disable 1:Enable	1	uint1 6	1	★
0x00 F5	FastCtCheckEn	W	0:disable 1:enable	1	uint1 6	1	★
0x00 F6	Rev						
0x00 F7	Rev						
0x00 F8	Rev						
0x00 F9	EVChargerAddr	W	0~255	1	uint1 6	1	★
0x00 FA	Rev						
0x00 FB	AdaptBoxG2Addr	W	0~255	1	uint1 6	1	★
0x00 FC	Rev			5			
0x00 FD	CTFalutEn	W	Cycle detection CT enable switch 0:Disable 1:Enable	1	uint1 6	1	★

	0x0F E	SuperBuckUpEn	W	Enable switch for EPS mode without battery 0:Disable 1:Enable	1	uint16	1	★
	0x0F F	SmartScheduleWorkMode	W	0:self use,1:Feedin Priority, 2:Bat not discharge	1	uint16	1	★
	0x01 00	ur GenCharge_StartHo	W	0-23	1	uint8(Hi)	1	★
		nute GenCharge_StartMi	W	0-59	1	uint8(Lo)	1	★
	0x01 01	ur GenCharge_EndHo	W	0-23	1	uint8(Hi)	1	★
		nute GenCharge_EndMi	W	0-59	1	uint8(Lo)	1	★
	0x01 02	Hour GenDischarge_Start	W	0-23	1	uint8(Hi)	1	★
		Minute GenDischarge_End	W	0-59	1	uint8(Lo)	1	★
	0x01 03	Hour GenDischarge_Start	W	0-23	1	uint8(Hi)	1	★
		Minute GenDischarge_End	W	0-59	1	uint8(Lo)	1	★
	0x01 04	GenP2_SetEnable		0:Disable 1:Enable	1	uint16	1	★
	0x01 05	Hour GenP2Charge_Start	W	0-23	1	uint8(Hi)	1	★
		Minute GenP2Charge_Start	W	0-59	1	uint8(Lo)	1	★
	0x01 06	Hour GenP2Charge_End	W	0-23	1	uint8(Hi)	1	★
		Minute GenP2Charge_End	W	0-59	1	uint8(Lo)	1	★
	0x01 07	artHour GenP2Discharge_St	W	0-23	1	uint8(Hi)	1	★
		ndMinute GenP2Discharge_E	W	0-59	1	uint8(Lo)	1	★
	0x01 08	artHour GenP2Discharge_St	W	0-23	1	uint8(Hi)	1	★
		ndMinute GenP2Discharge_E	W	0-59	1	uint8(Lo)	1	★
	0x01 09	ChargeFromGenEn able		0:Disable 1:Enable	1	uint16	1	★
	0x01 0A	ChargeFromGen_C hargeSoC		10~100	1%	uint16	1	★

0x01 0B	GenMinPower		0~60000	1W	uint16	1	★
0x01 0C	FastInEPS	W	0:Disable 1:Enable	1	uint16	1	
0x01 0D	BATtoHeatPumpEn	W	0:Disable 1:Enable	1	uint16	1	
0x01 0E	HeatPumpMeterAd dr	W	1~255	1	uint16	1	★
0x01 0F	REV(EVC COMSTAT)	W					
0x01 10	REV(HeatPump COMSTAT)	W					
0x01 11	bPowerPriorityCont rol	W	0:EVC 1:AdaptBox	0	uint16	1	★
0x01 12	bMaxPriorityPower	W	{0, 30000}	1w	uint16	1	★
0x01 13	bShotoffEn	W	0-1	1	uint16	1	
0x01 14	PowerFactor_Qu_V oltRatio2	W	0~60	1%	uint16	1	
0x01 15	PowerFactor_Qu_V oltRatio3	W	0~60	1%	uint16	1	

Table 3-1 Data format description



Master request format		
	Bytes number	Content format
Slave ID	1 byte	0x00~0xFF (Inverter default 0x01)
Function code	1 byte	0x06
Register address	2 byte Address MSB Address LSB	0x0000-0xFFFF
Value	2byte Data MSB Data LSB	0x0000-0xFFFF
CRC	2byte CRC MSB CRC MSB	
Slave normal response		
Slave ID	1 byte	0x00~0xFF (Inverter default 0x01)
Function code	1 byte	0x06
Register address	2 byte Address MSB Address LSB	0x0000-0xFFFF
Value	2byte Data MSB Data LSB	0x0000-0xFFFF
CRC	2byte CRC MSB CRC MSB	
Slave fault response		
Slave ID	1byte	0x00~0xFF (Inverter default 0x01)
Fault code	1byte	0x86
Abnormal code	1byte	0x01 or 0x02 or 0x03 or 0x04
CRC	2byte CRC MSB CRC MSB	



Example: Write CheckingTime 60s (Register:0x0002)

Master request: 01 06 00 02 00 3C 28 1B

Slave response: 01 06 00 02 00 3C 28 1B



0x10:Write Multiple Register

Function Code	Write multiple register							
	Register	Variable	W/R	Description	Unit	Data format	Length	EE Save
0x10	0x0000-0x0005	RTC-Seconds	W	RTC-Seconds 0~59	1s	uint16	6	
		RTC-Minutes	W	RTC-Minutes 0~59	1min	uint16		
		RTC-Hours	W	RTC-Hours	0~23	uint16		
		RTC-Days	W	RTC-Days	1~31	uint16		
		RTC-Months	W	RTC-Months	1~12	uint16		
		RTC-Years	W	RTC-Years	0~99	uint16		
	0x0006	REV	W	REV	-	uint16	21	
	0x001B~0x001E	NightCharge_P1_StartTime	W	StartHour	0~23	uint8(1bit)	1	★
				StartMinute	0~59	uint8(1bit)		
		NightCharge_P1_EndTime	W	StartHour	0~23	uint8(1bit)	1	
				StartMinute	0~59	uint8(1bit)		
		DisCharge_P1_StartTime	W	StartHour	0~23	uint8(1bit)	1	
				StartMinute	0~59	uint8(1bit)		
		DisCharge_P1_EndTime	W	StartHour	0~23	uint8(1bit)	1	
				StartMinute	0~59	uint8(1bit)		
	0x001F	REV	W	REV	-	uint16	8	
	0x0027	REV	W	REV	-	uint16	85	
0x007C	ModbusPowerControl	W	0:disable remote control 1:enable power control 2:enable electric quantity control	1	uint16	1		
0x007D	TargetSetType	W	1: set 2: update	1	uint16	1		

0x007E ~0x007F	RemoteControl ActivePower	W	0x007E(LSB) 0x007F(MSB) (Positive mean charge; Negative mean discharge)	1 W	int32	2	
0x0080 ~0x0081	RemoteControl ReactivePower	W	0x0080(LSB) 0x0081(MSB) (Positive mean Inductive reactive power;Negative mean	1V ar	int32	2	
0x0082	Time_of_Duration	W	power control mode	1s	Uint16	1	
0x0083	TargetSoc	W	Target soc	1%	Uint1	1	
0x0084	TargetEnergy	W	0x0084(LSB) 0x0085(MSB)	1 W	Uint32	2	
0x0086 ~0x0087	Charge_Discharg_ Power	W	0x0086(LSB) 0x0087(MSB) The power of charging or discharging (Positive mean charge; Negative mean	1 W	Int32	2	
0x0088	RemoteCtrlTimeOu	W	Timeout	1s	Uint1	1	
0x0089 ~0x008A	PushModePower		0x0089(LSB) 0x008A(MSB) The power of charging or discharging (Positive mean discharge Negative mean charge)	1 W	Int32	2	

0x10:Write Multiple Register(Data Hub)



Function code	Write multiple register(Data Hub)						
	Register	Variable	W/R	Description	Unit	Data form	EE Save
0x10	0xF000-0xF013	WriteSetValue	W	write the value of the setting	1	Uint16	★

Note: Only for internal device communication



Table 4-1 Data format description



Master request format		
	Bytes number	Content format
Slave ID	1 byte	0x00~0xFF (Inverter default 0x01)
Function code	1 byte	0x10
Register address	2 byte Address MSB Address LSB	0x0000-0xFFFF
Register number	2byte Number MSB Number LSB	0x0001-0x007B
Byte number	1Byte	2*N
Value	2*N byte Data MSB Data LSB	0x0000-0xFFFF
CRC	2byte CRC MSB CRC MSB	
Slave normal response		
Slave ID	1 byte	0x00~0xFF (Inverter default 0x01)
Function code	1 byte	0x10
Register address	2 byte Address MSB Address LSB	0x0000-0xFFFF
Register number	2byte Number MSB Number LSB	0x0001-0x007B
CRC	2byte CRC MSB CRC MSB	
Slave fault response		
Slave ID	1byte	0x00~0xFF (Inverter default 0x01)
Fault code	1byte	0x90



Abnormal code	1byte	0x01 or 0x02 or 0x03 or 0x04
CRC	2byte CRC MSB CRC MSB	

Example: Write RTCTime (Register: 0x0000~0x0005).

Master request: 01 10 00 00 00 06 0C 00 38 00 15 00 0E 00 0C 00 01 00 15 42 E9

Slave response: 01 10 00 00 00 06 40 0B



Upgrade W/R Register and Example

Function Code	Update W/R register						
	Register	Variable	W/R	Description	Unit	Data	Length
0x03	0x3000 ~0x3001	BootloaderVersion	R	BootloaderVersion	-	uint16	2
0x03/0x10	0x3002	IAP_Protocol	W/R	bit0:data transfer protocol bit1:high power	-	uint16	1
	0x3003	UpgradeModule	W/R	0: Rev 1: ARM 2: MDSP 3: SDSP 4: ARC 5: ARM+DSP 6: BMC M7: BMC C	-	uint16	1
	0x3004	UpgradeTimeOut	W/R	UpgradeTimeOut	1S	uint16	1
	0x3005 ~0x3006	UpgradeKey	W/R	UpgradeKey	-	uint16	2
0x03	0x3007 ~0x3008	UpgradeSeed	R	UpgradeSeed	-	uint16	2
	0x3009 ~0x300A	Rev	R	Rev		uint16	7
0x03/0x10	0x300B	UpgradeMachineTy	W/R	UpgradeMachineType	-	uint16	1
	0x300C ~0x300D	FileCheckSum	W/R	FileCheckSum	-	uint16	2
	0x300E ~0x300F	DownLoadBlockNum	W/R	data transfer mode:1 high power transfer mdoe:DownLoadBloc	-	uint16	1
	0x3010 ~0x3011	EraseStartAddr	W/R	EraseStartAddr	-	uint16	2
	0x3012 ~0x3013	EraseLength	W/R	EraseLength	-	uint16	2
	0x3014 ~0x3015	BlockStartAddr	W/R	BlockStartAddr	-	uint16	2

	0x30 1A ~0x3	BlockLength	W R	BlockLength	-	uint 16	2
	0x30 1C	CurrentBlockNum	W R	data transfer mode:1 high power transfer mdoe:CurrentBlockNu	-	uint 16	1
	0x30 1D ~0x3	BlockCheckSum	W R	BlockCheckSum	-	uint 16	2
	0x30	UpgradeDataPack	W	UpgradeDataPackage	-	uint	1
	0x30 20 ~0x3	UpgradeData	W R	UpgradeData	-	uint 16	12 0
0x03	0x30	BlockCheckResult	R	BlockCheckResult	-	uint	1
	0x30	McuDownLoadChe	R	McuDownLoadCheck	-	uint	1
	0x30 9A ~0x3	Rev	R	Rev	-	uint 16	10
	0x30	ToBeDownloadMcu	R	ToBeDownloadMcuInf	-	uint	1
	0x30	DownloadedMcuInf	R	DownloadedMcuInfor	-	uint	1
	0x30	UpgradeMcuInfor	R	UpdateMcuInfor	-	uint	1
	0x30 A7	lapState	R	0x0000:AppCommon RunStatus 0x0001:AppResume WaitStatus 0x0002:EraseProgra mStatus 0x0003:ProgramDow nloadStatus 0x0004:UpgradeSucc essStatus 0x0005:UpgradeFailS	-	uint 16	1
	0x30	DownloadedBlock	R	DownloadedBlockNu	-	uint	1
	0x30	DownloadedPacka	R	DownloadedPackage	-	uint	1
0x03/0 x10	0x30 AA ~0x3	File_Name	W R	File_Name	-	uint 16	25



Second step: Send the upgrade **machine type**, **the overall checksum of the upgrade file** and **file size of the upgrade file**. The inverter will erase the flash and wait to receive the upgrade package.

User → Inverter: 01 10 30 10 00 0F 1E 00 00 8D 6B 00 00 00 01 00 00 00 00 00 00 00 00 00 00
00 00 60 96 00 09 00 01 00 00 00 00 ED B4
Inverter → User : 01 10 30 10 00 0F 8E C8

Third step: Send the **name of the upgrade file**, the following message file name is “618.00405.00_HYB_3P_DSP_V1.10_1009.usb”, default information zero padding.

User → Inverter: 01 10 30 AA 00 19 32 36 31 38 2E 30 30 34 30 35 2E 30 30 5F 48 59 42 5F 33
50 5F 44 53 50 5F 56 31 2E 31 30 5F 31 30 30 39 2E 75 73 62 00 00 00 00 00 00 00 00 00 00
00 35 23
Inverter → User : 01 10 30 AA 00 19 2E E3

Fourth step: Send the **packtage number** and the datas of the upgrade file to inverter, send **240 bytes** at a time. The last packet is less than 240 bytes to fill with 0.

User → Inverter: 01 10 30 1F 00 79 F2 00 01 BA 30 32 30 30 30 30 34 30 30 30 38 46 32 0D
0A 3A 30 34 34 30 30 32 30 30 46 32 42 32 30 30 30 31 31 35 0D 0A 3A 30 32 30 30 30 30 34
30 30 30 38 46 32 0D 0A 3A 30 34 34 30 30 34 30 30 30 30 34 39 45 34 32 33 36 38 0D 0A 3A
32 30 34 30 30 38 30 30 37 36 31 46 30 35 32 41 30 41 33 43 39 32 33 43 35 32 32 38 36 39 30
35 37 36 31 46 30 34 38 30 31 41 30 31 30 31 30 30 30 30 36 46 45 30 36 37 36 31 46 30 35
30 30 39 32 30 43 39 36 34 31 38 41 0D 0A 3A 32 30 34 30 31 38 30 30 39 32 30 44 39 36 34 32
39 32 30 45 39 36 34 33 35 38 34 33 38 46 30 31 34 30 30 39 44 38 30 36 39 32 39 34 39 36 34
34 35 38 34 33 44 38 30 37 39 32 39 34 39 36 34 35 35 38 34 33 44 38 30 38 35 30 0D 0A 3A 32
30 34 30 32 38 30 30 39 62 59
Inverter → User : 01 10 30 1F 00 79 3F 2D

...

...

Subsequent data interaction processing is similar to the fourth step, Relevant information can be obtained through the document 《UpgradeProcessData.TXT》

Supplement:

1. The part marked in yellow is the register of the main function currently used. Other parameters are not currently used, and are prepared for the future upgrade of the function expansion. You do not need to pay attention to it at present.
2. In order to facilitate the capture of data packets, the response delay on the inverter side has been adjusted, and the response delay in the actual upgrade process will be lower.
3. The baud rate has a direct impact on the overall time of the upgrade, it is recommended to use 19200 or 38400.
4. After the file download is complete, the inverter will initiate the subsequent upgrade process, and it will take a certain time to complete the upgrade operation of the corresponding object.
5. In the second step, the erasing process is initiated. Since the inverter takes a certain time to erase the Flash, it is recommended to wait for a 10-second timeout for this response.
6. The UpgradeMachineType(0x3010) in the second step is currently not used, default fill 0.
7. In the second step, the file verification also uses the modbus CRC16 calculation method.
8. Complete the write operation by 0x10 function code, and 0x03 function code for query response processing
9. For the upgrade objects supported by X1G4 and X3G4 models (UpgradeModule 0x3003):
1:ARM 2:MDSP 5:ARM+DSP 6:BMS_M 7: BMS_S
10. The function upgraded through modbus is in the development stage, and the incomplete part can be adjusted and improved in the future.
11. Follow-up supplements for the failure of the upgrade, such as illegal file name, mismatch between the upgrade object and the file, file verification mismatch, etc.